

## Gear racks

Standard and customized

### **Latest version of the catalogs**

You can always find the latest version of our catalogs in the Download area of our website.

### **Disclaimer**

This publication has been compiled with great care and all information has been checked for accuracy. However, we can assume no liability for incorrect or incomplete information. We reserve the right to make changes to the information and technical data as a result of enhancements to our products. Reprinting or reproducing, even in part, is not permitted without our written consent.




## Table of contents

	Page number
<b>1 Overview</b>	<b>4</b>
1.1 Range of versions	4
1.2 Properties of the gear racks/ conversion	5
1.3 Conversion/ hardness/ strength	6
1.4 Fields of application	7
<b>2 Technical principles</b>	<b>8</b>
<b>Standard gear rack</b>	<b>8</b>
2.1 Module pitches Q5 - Q11, helical toothed	8
2.2 Module pitches Q5 - Q11, straight toothed	15
2.3 Q6 metric pitch, straight toothed	22
2.4 Q6 stainless steel, helical toothed metric pitch	23
2.5 Q6 stainless steel straight toothed module pitch	24
2.6 Q6 stainless steel, straight toothed, metric pitch	25
<b>Customised gear racks</b>	<b>26</b>
2.7 Customised gear racks	26
<b>3 Installation</b>	<b>27</b>
3.1 Gear rack fitting instructions / lubrication	27
<b>4 Order description</b>	<b>28</b>
4.1 Standard gear racks	28
4.2 Customised gear racks	29
<b>5 Quality</b>	<b>30</b>
5.1 Quality	30

## 1.1 Overview

### Range of versions

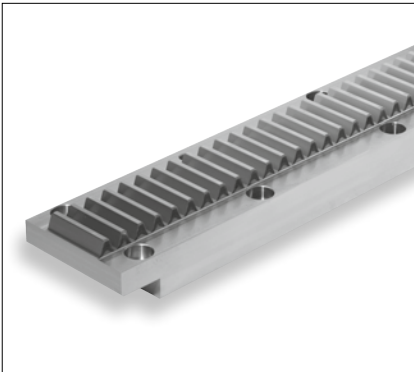

#### Gear racks

Gear rack drives main feature is their high level of efficiency. They are the best choice for high axial forces.

This drive rigidity is constant over the whole length.

They are also very cost effective for long strokes of more than 2 m.


With a rack and pinion system a slideway is driven by the pinion running on a fixed gear rack.

There is a basic difference between straight and helical toothed gear racks.

Apart from typical dimensions, SCHNEEBERGER offers any cross sections with metric or module pitches. The max. one-piece length is 3000 mm. Joining with butt joints is possible for longer lengths.

The tooth rack can be milled or ground depending on the customer's requirements. A particular feature is that different materials and hardening processes can be used. Depending on the load to be applied you have a choice of soft, induction or case hardened or nitride hardened gear racks.

**Skill and expertise are our strengths!**

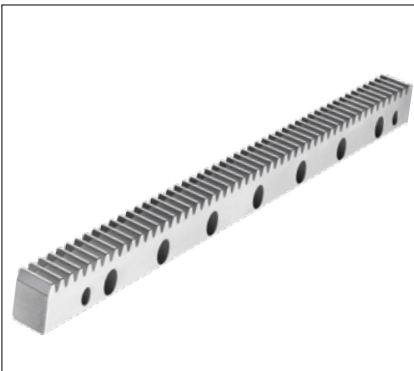

#### Standard gear racks

Straight and helical toothed gear racks are available in typical industrial dimensions from module 2 to module 12. Different materials, hardnesses and accuracy are available depending on the load to be applied.



#### Customised gear racks

You need a gear rack but standardised dimensions do not fit your system?

No problem.

You can have any gear racks up to module 20. The maximum one-piece length is 3000 mm.

The customer can choose from different materials and therefore configure the gear rack just as required.

**Special is our standard.**

## 1.2 Overview

## Properties of the gear racks/ conversion

### Modular tooth pitch (-M)

Tooth rack	Material condition	Material	Modules	max. length for following qualities						
				Q4	Q5	Q6	Q7	Q8	Q9	Q11
helical (-S-)	soft (-W-)	C45, 42CrMo4 V, 16MnCr5	2 ... 20	1000	2000	3000	3000	3000		
	induction hardened (-I-)	C45, 42CrMo4 V	2 ... 20	1000	2000	2000	2000			
			2 ... 4						3000	
	case hardened (-C-)	16MnCr5	2 ... 20	1000						
			2 ... 3		1500	1500	1500			
			4 ... 20		2000	2000	2000			
nitrided (-N-)	42CrMo4 V, 16MnCr5	2 ... 20						2000		
through hardened (-H-)	X90CrMo V18	2 ... 5	1000	1000	1000	1000				
straight (-G-)	soft (-W-)	C45, 42CrMo4 V, 16MnCr5	2 ... 20	1018	2035	3000	3000	3000		
	induction hardened (-I-)	C45, 42CrMo4 V	2 ... 20	1018	2035	2035	2035			
			2 ... 4						3000	
	case hardened (-C-)	16MnCr5	2 ... 20	1018						
			2 ... 3		1522	1522	1522			
			4 ... 20		2035	2035	2035			
nitrided (-N-)	42CrMo4 V, 16MnCr5	2 ... 20						2035		
through hardened (-H-)	X90CrMo V18	2 ... 5	1018	1018	1018	1018				

### Metric tooth pitch (-T)

Tooth rack	Material condition	Material	Pitch (mm)	max. length for following qualities						
				Q4	Q5	Q6	Q7	Q8	Q9	Q11
straight (-G-)	soft (-W-)	C45, 42CrMo4 V, 16MnCr5	5 ... 20	1018	1018	3000	3000	3000		
	induction hardened (-I-)	C45, 16MnCr5	5 ... 20	1018	1018	2035	2035			
			5 ... 10						3000	
	case hardened (-C-)	16MnCr5	5 ... 20	1018						
			5 ... 12,5		1522	1522	1522			
			15 ... 20		2035	2035	2035			
nitrided (-N-)	42CrMo4 V, 16MnCr5	5 ... 20						2035		
through hardened (-H-)	X90CrMo V18	5 ... 15		1018	1018	1018				

### Cross reference of material designations

Germany		Japan	USA	China	Special properties
W.-Nr.	DIN	JIS	AIS/SAE	GB	
1.0503	C45	-	1045	45	
1.7131	16MnCr5	-	5115	18CrMn	can be welded
1.7225	42CrMo4 V	SCM 440 (H)	4140	42CrMo	
1.4112	X90CrMo V18	SUS 440B	440B	9Cr18 oV	Stainless steel

## 1.3 Overview

### Conversion/ hardness/ strength

Converting a module m into a pitch p (straight toothed) and front pitch ps for helical tooth racks


Module m	2	3	4	5	6	8	10	12	16	20
Pitch p (mm)	6,28	9,42	12,57	15,71	18,85	25,13	31,42	37,70	50,27	62,83
End pitch (ps1)(mm)	6,67	10,00	13,33	16,67	20,00	26,67	33,33	40,00	53,33	66,67

<sup>1)</sup> where  $\beta=19.5283^\circ$

Converting pitch p (straight toothed) into a module m

Pitch p (mm)	5.00	7.50	10.00	12.50	15.00	20.00
Module m	1.59	2.39	3.18	3.98	4.77	6.37

p Pitch in mm       $\beta$  Helix angle  
 $p_s$  End pitch in mm       $p=m \cdot \pi$   
 m Module       $p=m \cdot \pi / \cos \beta$

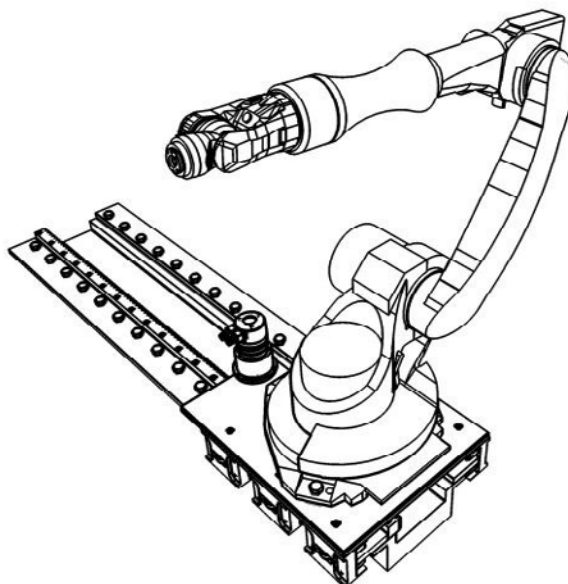

Hardness/ strength of tooth rack

Condition of teeth	Material	Tensile strength $R_m$ N/mm <sup>2</sup>	Hardness	
			HRC	HV1
soft	C45	~650		
tempered	42CrMo4 V	max. 1000		
induction hardened	C45		55 ... 60	
	42CrMo4 V		59 <sup>±3</sup>	
case hardened	16MnCr5		58 <sup>±3</sup>	
nitrided	42CrMo4 V, 16MnCr5			550..700
through hardened	X90CrMoV18		56 <sup>±2</sup>	

CUSTOMER-SPECIFIC BEARINGS AND GEAR RACKS

## Exploring new shores.

When research vessels investigate climate change in the Antarctic, Schneeberger has already played its part in the expedition.

Our linear motion technology makes an important contribution in the construction of large ships and their drive systems in particular. Gigantic crankshafts and driveshafts are turned, milled, ground and repaired on large, multipurpose extended-bed lathes – with exacting tolerances despite a 40 metre stroke. When our customers approach us about applications such as this, we respond with custom bearings and gear racks. We also supply components for use in electricity generation, for example in the manufacturing of rotor heads or gears for wind turbines. This means we can make our own contribution to exploiting new sources of energy.

Our custom bearings and gear racks can be used in any application

where standard bearings do not meet the machine builder's requirements due to size or accuracy. The results are customer-specific, innovative solutions.


We can create guideways with running characteristics, with exceedingly high rigidity or with extremely high load carrying capacities. When you come to Schneeberger, you do not have to accept any compromises. Our universal machine pool and highly competent engineers allow us to respond to complex customer demands for products both quickly and efficiently. Initially in small batches for prototype requirements, and then in larger series volumes, guaranteeing consistently high quality and a reliable, secure source of supply.



### Typical applications

Gear racks provides users with definite competitive advantages in the following industries:

- Machine tools
- Heavy machine construction
- Automation and robotics
- Material handling and material flow systems
- Machine and plant engineering
- Packaging machines
- Printing presses

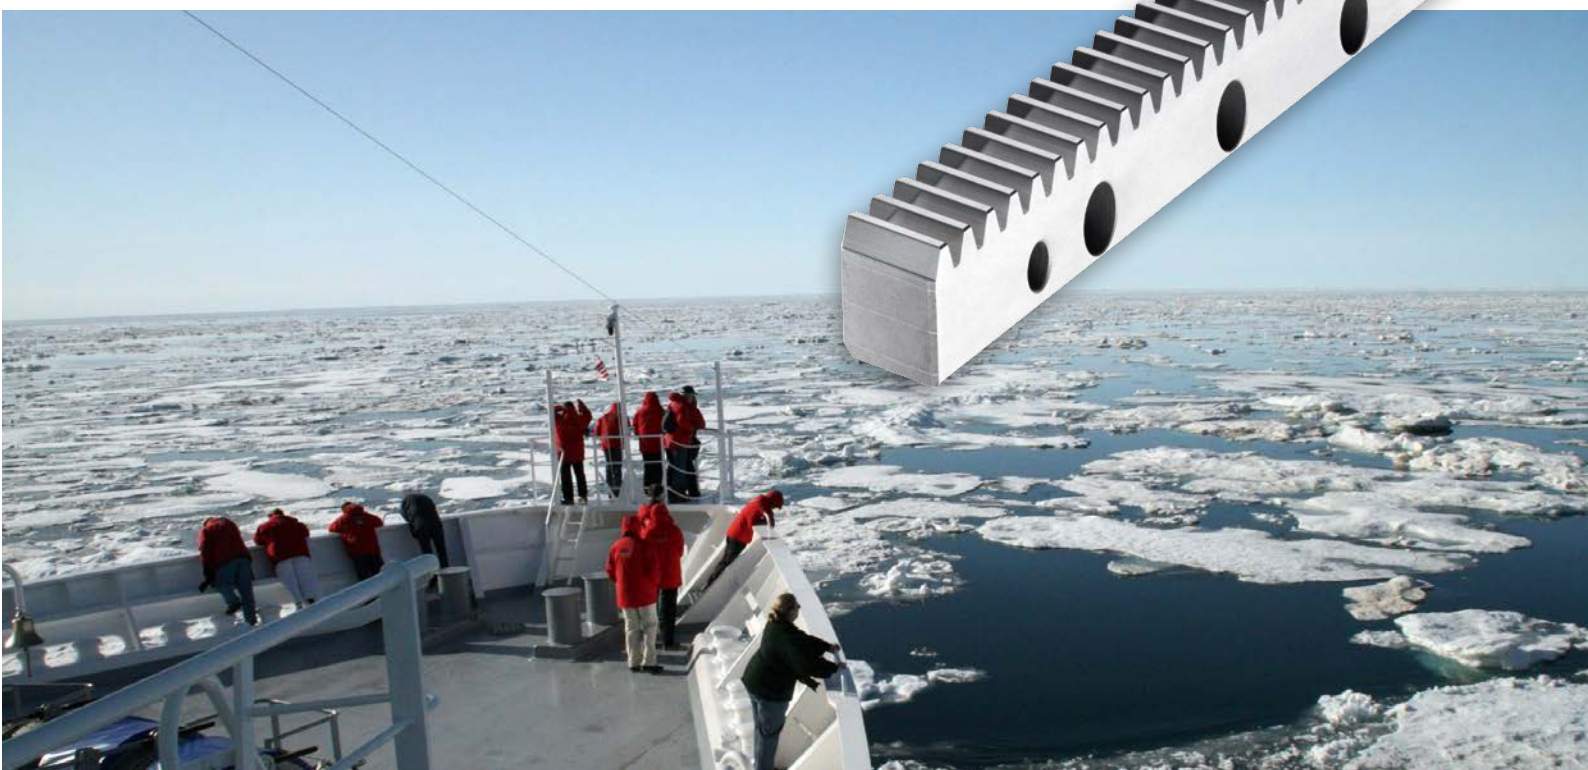



## 2.1 Technical principles

### Module pitches helical toothed

**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground, soft or hardened

**Outer surfaces:** ground on all sides

**Quality:** 4 in accordance with DIN 3962, 3963, 3967

**$f_p$  (mm)** Single pitch deviation  
Module  $\leq 3$ : 0.003  
Module  $> 3$ : 0.0804

**$F_p$  (mm)** Total pitch deviation  
 **$F_p/1000$  (mm)** 0,015 for a 1000 mm Length

Fig. 1

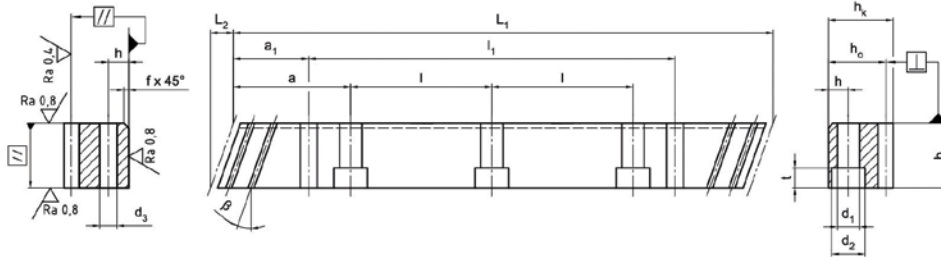


Fig. 2


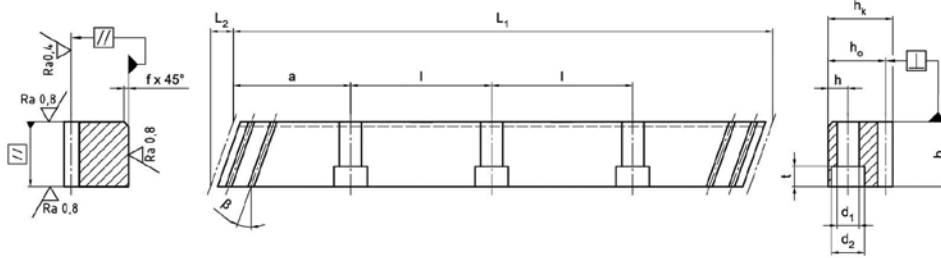


Fig. 3

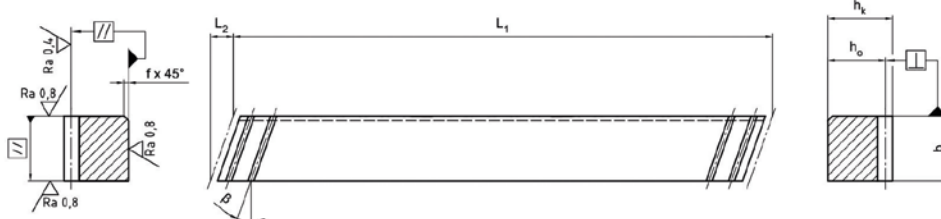

Standard lengths	$m^{1)}$	$p_s^{4)}$	$L_1$	$L_2$	$z^{2)}$	$b$	$h_k$	$h_0$	$f$	$a$	$l$	$n^{3)}$	$h$	$d_1$	$d_2$	$t$	$a_1$	$l_1$	$d_3$	Dimensions
	-	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	mm	kg
ZST M2 - 24 x 24 x 1000 - S	2	6.67	1000.0	8.5	150	24	24	22	2	62.5	125.00	8	8	7	11	7	31.7	936.6	5.7	4.1
ZST M2 - 24 x 24 x 2000 - S	2	6.67	2000.0	8.5	300	24	24	22	2	62.5	125.00	16	8	7	11	7	31.7	1936.6	5.7	8.2
MST M2 - 24 x 24 x 200 - SL	2	6.67	200.0	8.5	30	24	24	22												0.8
ZST M3 - 29 x 29 x 1000 - S	3	10.00	1000.0	10.3	100	29	29	26	2	62.5	125.00	8	9	10	15	9	35.0	930.0	7.7	5.9
ZST M3 - 29 x 29 x 2000 - S	3	10.00	2000.0	10.3	200	29	29	26	2	62.5	125.00	16	9	10	15	9	35.0	1930.0	7.7	11.8
MST M3 - 29 x 29 x 200 - SL	3	10.00	200.0	10.3	20	29	29	26												1.2
ZST M4 - 39 x 39 x 1000 - S	4	13.33	1000.0	13.8	75	39	39	35	3	62.5	125.00	8	12	10	15	9	33.3	933.4	7.7	10.7
ZST M4 - 39 x 39 x 2000 - S	4	13.33	2000.0	13.8	150	39	39	35	3	62.5	125.00	16	12	10	15	9	33.3	1933.4	7.7	21.4
MST M4 - 39 x 39 x 200 - SL	4	13.33	200.0	13.8	15	39	39	35												2.2
ZST M5 - 49 x 39 x 1000 - S	5	16.67	1000.0	17.4	60	49	39	34	3	62.5	125.00	8	12	14	20	13	37.5	925.0	11.7	13.0
ZST M5 - 49 x 39 x 2000 - S	5	16.67	2000.0	17.4	120	49	39	34	3	62.5	125.00	16	12	14	20	13	37.5	1925.0	11.7	26.0
MST M5 - 49 x 39 x 200 - SL	5	16.67	200.0	17.4	12	49	39	34												2.7
ZST M6 - 59 x 49 x 1000 - S	6	20.00	1000.0	20.9	50	59	49	43	3	62.5	125.00	8	16	18	26	17	37.5	925.0	15.7	18.1
ZST M6 - 59 x 49 x 2000 - S	6	20.00	2000.0	20.9	100	59	49	43	3	62.5	125.00	16	16	18	26	17	37.5	1925.0	15.7	36.2
MST M6 - 59 x 49 x 200 - SL	6	20.00	200.0	20.9	10	59	49	43												3.8
ZST M8 - 79 x 79 x 960 - S	8	26.67	960.0	28.0	36	79	79	71	3	60.0	120.00	8	25	22	33	21	120.0	720.0	19.7	42.5
ZST M8 - 79 x 79 x 1920 - S	8	26.67	1920.0	28.0	72	79	79	71	3	60.0	120.00	16	25	22	33	21	120.0	1680.0	19.7	85.0
MST M8 - 79 x 79 x 213 - SL	8	26.67	213.3	28.0	8	79	79	71												8.9
ZST M10 - 99 x 99 x 1000 - S	10	33.33	1000.0	35.1	30	99	99	89	3	62.5	125.00	8	32	33	48	32	125.0	750.0	19.7	68.7
MST M10 - 79 x 79 x 233 - SL	10	33.33	233.3	28.0	7	79	79	69												10.2
ZST M12 - 120 x 120 x 1000 - S	12	40.00	1000.0	42.6	25	120	120	108	3	40.0	125.00	8	40	39	58	38	125.0	750.0	19.7	111.0
MST M12 - 99 x 99 x 280 - SL	12	40.00	280.0	35.1	7	99	99	87												20.9

<sup>1)</sup> m Module

<sup>3)</sup> n Number of holes

<sup>2)</sup> z Number of teeth

<sup>4)</sup>  $p_s$  End pitch ( $p_s = m \cdot \pi / \cos \beta$ )

$\beta = 19.5283^\circ (19^\circ 31' 42'')$

any other lengths on request



2.1 Technical principles

Module pitches helical toothed

**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground, soft or hardened

**Outer surfaces:** ground on all sides

**Quality:** 5 in accordance with DIN 3962, 3963, 3967

**$f_p$  (mm)** Single pitch deviation  
Module  $\leq 3$ : 0,004  
Module  $> 3$ : 0,005

**$F_p$  (mm)** Total pitch deviation  
 **$F_p/1000$  (mm)** 0.024 for a 1000 mm length  
 **$F_p/2000$  (mm)** 0.032 for a 2000 mm length

Fig. 1

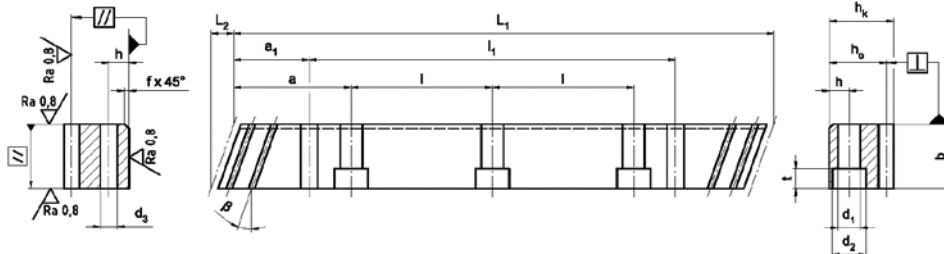


Fig. 2


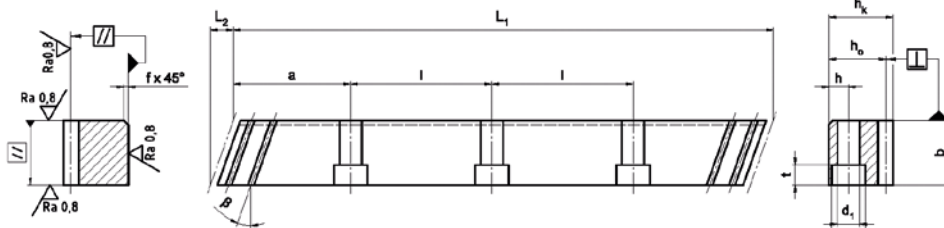


Fig. 3

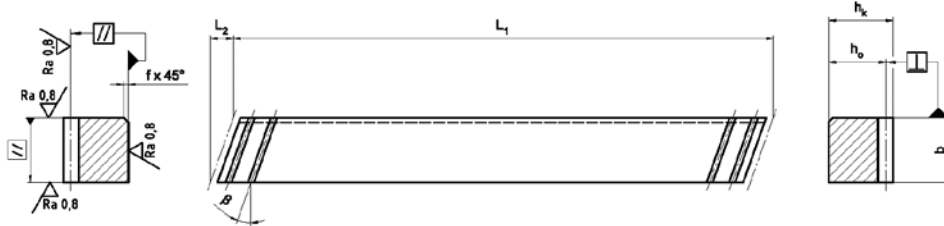

Standard lengths	m <sup>1)</sup>	p <sub>s</sub> <sup>4)</sup>	L <sub>1</sub>	L <sub>2</sub>	z <sup>2)</sup>	b	h <sub>k</sub>	h <sub>o</sub>	f	a	l	n <sup>3)</sup>	h	d <sub>1</sub>	d <sub>2</sub>	t	a <sub>1</sub>	l <sub>1</sub>	d <sub>3</sub>	Dimensions kg
	-	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	mm	
ZST M2 - 24 x 24 x 1000 - S	2	6.67	1000.0	8.5	150	24	24	22	2	62.5	125.00	8	8	7	11	7	31.7	936.6	5.7	4.1
ZST M2 - 24 x 24 x 2000 - S	2	6.67	2000.0	8.5	300	24	24	22	2	62.5	125.00	16	8	7	11	7	31.7	1936.6	5.7	8.2
MST M2 - 24 x 24 x 200 - SL	2	6.67	200.0	8.5	30	24	24	22												0.8
ZST M3 - 29 x 29 x 1000 - S	3	10.00	1000.0	10.3	100	29	29	26	2	62.5	125.00	8	9	10	15	9	35.0	930.0	7.7	5.9
ZST M3 - 29 x 29 x 2000 - S	3	10.00	2000.0	10.3	200	29	29	26	2	62.5	125.00	16	9	10	15	9	35.0	1930.0	7.7	11.8
MST M3 - 29 x 29 x 200 - SL	3	10.00	200.0	10.3	20	29	29	26												1.2
ZST M4 - 39 x 39 x 1000 - S	4	13.33	1000.0	13.8	75	39	39	35	3	62.5	125.00	8	12	10	15	9	33.3	933.4	7.7	10.7
ZST M4 - 39 x 39 x 2000 - S	4	13.33	2000.0	13.8	150	39	39	35	3	62.5	125.00	16	12	10	15	9	33.3	1933.4	7.7	21.4
MST M4 - 39 x 39 x 200 - SL	4	13.33	200.0	13.8	15	39	39	35												2.2
ZST M5 - 49 x 39 x 1000 - S	5	16.67	1000.0	17.4	60	49	39	34	3	62.5	125.00	8	12	14	20	13	37.5	925.0	11.7	13.0
ZST M5 - 49 x 39 x 2000 - S	5	16.67	2000.0	17.4	120	49	39	34	3	62.5	125.00	16	12	14	20	13	37.5	1925.0	11.7	26.0
MST M5 - 49 x 39 x 200 - SL	5	16.67	200.0	17.4	12	49	39	34												2.7
ZST M6 - 59 x 49 x 1000 - S	6	20.00	1000.0	20.9	50	59	49	43	3	62.5	125.00	8	16	18	26	17	37.5	925.0	15.7	18.1
ZST M6 - 59 x 49 x 2000 - S	6	20.00	2000.0	20.9	100	59	49	43	3	62.5	125.00	16	16	18	26	17	37.5	1925.0	15.7	36.2
MST M6 - 59 x 49 x 200 - SL	6	20.00	200.0	20.9	10	59	49	43												3.8
ZST M8 - 79 x 79 x 960 - S	8	26.67	960.0	28.0	36	79	79	71	3	60.0	120.00	8	25	22	33	21	120.0	720.0	19.7	42.5
ZST M8 - 79 x 79 x 1920 - S	8	26.67	1920.0	28.0	72	79	79	71	3	60.0	120.00	16	25	22	33	21	120.0	1680.0	19.7	85.0
MST M8 - 79 x 79 x 213 - SL	8	26.67	213.3	28.0	8	79	79	71												8.9
ZST M10 - 99 x 99 x 1000 - S	10	33.33	1000.0	35.1	30	99	99	89	3	62.5	125.00	8	32	33	48	32	125.0	750.0	19.7	68.7
MST M10 - 79 x 79 x 233 - SL	10	33.33	233.3	28.0	7	79	79	69												10.2
ZST M12 - 120 x 120 x 1000 - S	12	40.00	1000.0	42.6	25	120	120	108	3	40.0	125.00	8	40	39	58	38	125.0	750.0	19.7	111.0
MST M12 - 99 x 99 x 280 - SL	12	40.00	280.0	35.1	7	99	99	87												20.9

<sup>1)</sup> m Module

<sup>3)</sup> n Number of holes

<sup>2)</sup> z Number of teeth

<sup>4)</sup> p<sub>s</sub> End pitch (p<sub>s</sub> = m \* π / cos β)

β = 19.5283° (19°31'42")

any other lengths on request

## 2.1 Technical principles

### Module pitches helical toothed

**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground, soft or hardened

**Outer surfaces:** ground on all sides

**Quality:** 6 in accordance with DIN 3962, 3963, 3967

**$f_p$  (mm)** Single pitch deviation  
Module  $\leq 3$ : 0.006  
Module  $> 3$ : 0.008

**$F_p$  (mm)** Total pitch deviation  
 **$F_p/1000$  (mm)** 0,035 for a 1000 mm Length  
 **$F_p/2000$  (mm)** 0,045 for a 2000 mm Length

Fig. 1

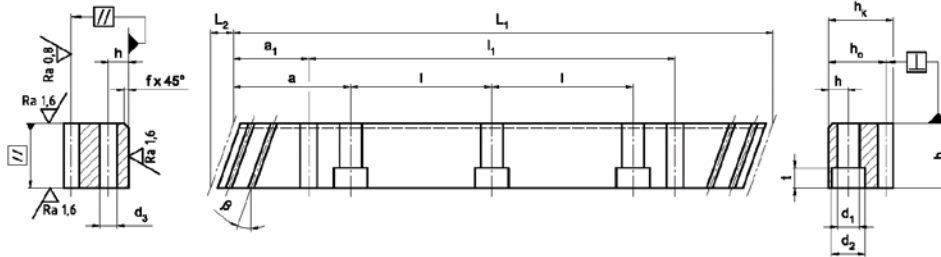


Fig. 2


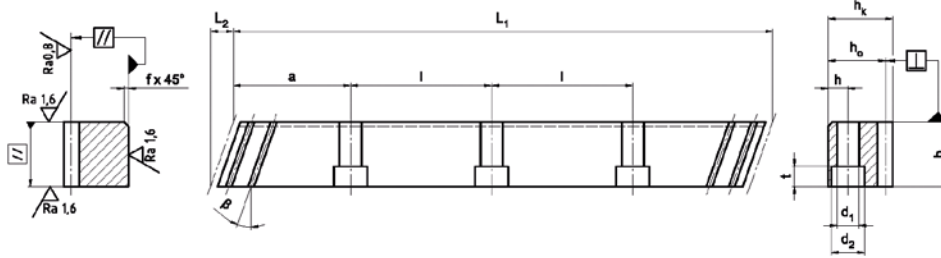


Fig. 3

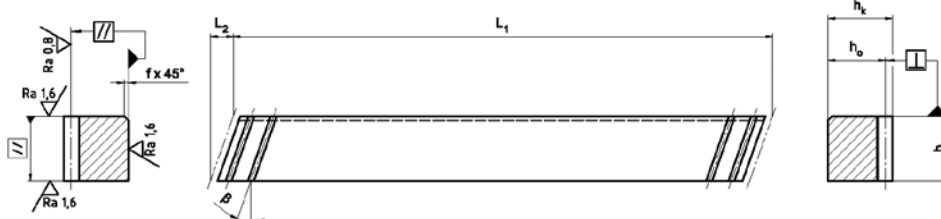

Standard lengths	$m^1)$	$p_s^4)$	$L_1$	$L_2$	$z^2)$	$b$	$h_k$	$h_o$	$f$	$a$	$l$	$n^3)$	$h$	$d_1$	$d_2$	$t$	$a_1$	$l_1$	$d_3$	Dimensions kg
	-	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	mm	
ZST M2 - 24 x 24 x 1000 - S	2	6.67	1000.0	8.5	150	24	24	22	2	62.5	125.00	8	8	7	11	7	31.7	936.6	5.7	4.1
ZST M2 - 24 x 24 x 2000 - S	2	6.67	2000.0	8.5	300	24	24	22	2	62.5	125.00	16	8	7	11	7	31.7	1936.6	5.7	8.2
MST M2 - 24 x 24 x 200 - SL	2	6.67	200.0	8.5	30	24	24	22												0.8
ZST M3 - 29 x 29 x 1000 - S	3	10.00	1000.0	10.3	100	29	29	26	2	62.5	125.00	8	9	10	15	9	35.0	930.0	7.7	5.9
ZST M3 - 29 x 29 x 2000 - S	3	10.00	2000.0	10.3	200	29	29	26	2	62.5	125.00	16	9	10	15	9	35.0	1930.0	7.7	11.8
MST M3 - 29 x 29 x 200 - SL	3	10.00	200.0	10.3	20	29	29	26												1.2
ZST M4 - 39 x 39 x 1000 - S	4	13.33	1000.0	13.8	75	39	39	35	3	62.5	125.00	8	12	10	15	9	33.3	933.4	7.7	10.7
ZST M4 - 39 x 39 x 2000 - S	4	13.33	2000.0	13.8	150	39	39	35	3	62.5	125.00	16	12	10	15	9	33.3	1933.4	7.7	21.4
MST M4 - 39 x 39 x 200 - SL	4	13.33	200.0	13.8	15	39	39	35												2.2
ZST M5 - 49 x 39 x 1000 - S	5	16.67	1000.0	17.4	60	49	39	34	3	62.5	125.00	8	12	14	20	13	37.5	925.0	11.7	13.0
ZST M5 - 49 x 39 x 2000 - S	5	16.67	2000.0	17.4	120	49	39	34	3	62.5	125.00	16	12	14	20	13	37.5	1925.0	11.7	26.0
MST M5 - 49 x 39 x 200 - SL	5	16.67	200.0	17.4	12	49	39	34												2.7
ZST M6 - 59 x 49 x 1000 - S	6	20.00	1000.0	20.9	50	59	49	43	3	62.5	125.00	8	16	18	26	17	37.5	925.0	15.7	18.1
ZST M6 - 59 x 49 x 2000 - S	6	20.00	2000.0	20.9	100	59	49	43	3	62.5	125.00	16	16	18	26	17	37.5	1925.0	15.7	36.2
MST M6 - 59 x 49 x 200 - SL	6	20.00	200.0	20.9	10	59	49	43												3.8
ZST M8 - 79 x 79 x 960 - S	8	26.67	960.0	28.0	36	79	79	71	3	60.0	120.00	8	25	22	33	21	120.0	720.0	19.7	42.5
ZST M8 - 79 x 79 x 1920 - S	8	26.67	1920.0	28.0	72	79	79	71	3	60.0	120.00	16	25	22	33	21	120.0	1680.0	19.7	85.0
MST M8 - 79 x 79 x 213 - SL	8	26.67	213.3	28.0	8	79	79	71												8.9
ZST M10 - 99 x 99 x 1000 - S	10	33.33	1000.0	35.1	30	99	99	89	3	62.5	125.00	8	32	33	48	32	125.0	750.0	19.7	68.7
MST M10 - 79 x 79 x 233 - SL	10	33.33	233.3	28.0	7	79	79	69												10.2
ZST M12 - 120 x 120 x 1000 - S	12	40.00	1000.0	42.6	25	120	120	108	3	40.0	125.00	8	40	39	58	38	125.0	750.0	19.7	111.0
MST M12 - 99 x 99 x 280 - SL	12	40.00	280.0	35.1	7	99	99	87												20.9

<sup>1)</sup> m Module

<sup>3)</sup> n Number of holes

<sup>2)</sup> z Number of teeth

<sup>4)</sup>  $p_s$  End pitch ( $p_s = m \cdot \pi / \cos \beta$ )

$\beta = 19.5283^\circ (19^\circ 31' 42'')$

any other lengths on request

**2.1** Technical principles

Module pitches helical toothed


**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground, soft or hardened

**Outer surfaces:** ground on all sides

**Quality:** 5 in accordance with DIN 3962, 3963, 3967

**$f_p$  (mm)** Single pitch deviation  
Module  $\leq 3$ : 0,007  
Module  $> 3$ : 0,009

**$F_p$  (mm)** Total pitch deviation  
 **$F_p/1000$  (mm)** 0.060 for a 1000 mm length  
 **$F_p/2000$  (mm)** 0.075 for a 2000 mm length

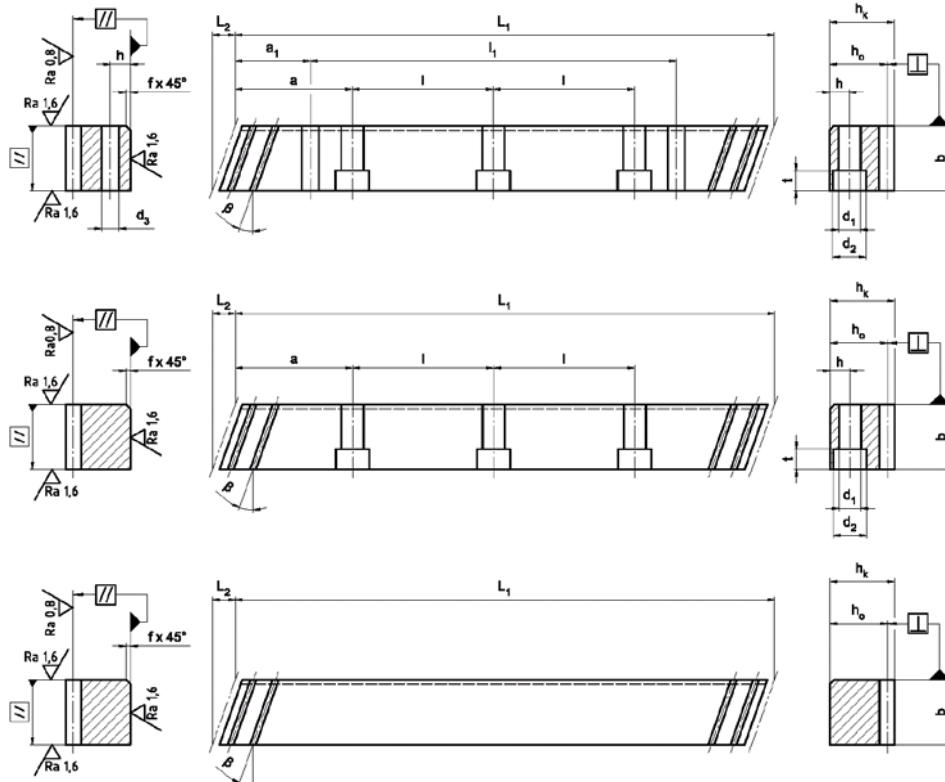

Standard lengths	m <sup>1)</sup>	p <sub>s</sub> <sup>4)</sup>	L <sub>1</sub>	L <sub>2</sub>	z <sup>2)</sup>	b	h <sub>k</sub>	h <sub>o</sub>	f	a	l	n <sup>3)</sup>	h	d <sub>1</sub>	d <sub>2</sub>	t	a <sub>1</sub>	l <sub>1</sub>	d <sub>3</sub>	Dimensions
	-	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	mm	kg
ZST M2 - 24 x 24 x 1000 - S	2	6.67	1000.0	8.5	150	24	24	22	2	62.5	125.00	8	8	7	11	7	31.7	936.6	5.7	4.1
ZST M2 - 24 x 24 x 2000 - S	2	6.67	2000.0	8.5	300	24	24	22	2	62.5	125.00	16	8	7	11	7	31.7	1936.6	5.7	8.2
MST M2 - 24 x 24 x 200 - SL	2	6.67	200.0	8.5	30	24	24	22												0.8
ZST M3 - 29 x 29 x 1000 - S	3	10.00	1000.0	10.3	100	29	29	26	2	62.5	125.00	8	9	10	15	9	35.0	930.0	7.7	5.9
ZST M3 - 29 x 29 x 2000 - S	3	10.00	2000.0	10.3	200	29	29	26	2	62.5	125.00	16	9	10	15	9	35.0	1930.0	7.7	11.8
MST M3 - 29 x 29 x 200 - SL	3	10.00	200.0	10.3	20	29	29	26												1.2
ZST M4 - 39 x 39 x 1000 - S	4	13.33	1000.0	13.8	75	39	39	35	3	62.5	125.00	8	12	10	15	9	33.3	933.4	7.7	10.7
ZST M4 - 39 x 39 x 2000 - S	4	13.33	2000.0	13.8	150	39	39	35	3	62.5	125.00	16	12	10	15	9	33.3	1933.4	7.7	21.4
MST M4 - 39 x 39 x 200 - SL	4	13.33	200.0	13.8	15	39	39	35												2.2
ZST M5 - 49 x 39 x 1000 - S	5	16.67	1000.0	17.4	60	49	39	34	3	62.5	125.00	8	12	14	20	13	37.5	925.0	11.7	13.0
ZST M5 - 49 x 39 x 2000 - S	5	16.67	2000.0	17.4	120	49	39	34	3	62.5	125.00	16	12	14	20	13	37.5	1925.0	11.7	26.0
MST M5 - 49 x 39 x 200 - SL	5	16.67	200.0	17.4	12	49	39	34												2.7
ZST M6 - 59 x 49 x 1000 - S	6	20.00	1000.0	20.9	50	59	49	43	3	62.5	125.00	8	16	18	26	17	37.5	925.0	15.7	18.1
ZST M6 - 59 x 49 x 2000 - S	6	20.00	2000.0	20.9	100	59	49	43	3	62.5	125.00	16	16	18	26	17	37.5	1925.0	15.7	36.2
MST M6 - 59 x 49 x 200 - SL	6	20.00	200.0	20.9	10	59	49	43												3.8
ZST M8 - 79 x 79 x 960 - S	8	26.67	960.0	28.0	36	79	79	71	3	60.0	120.00	8	25	22	33	21	120.0	720.0	19.7	42.5
ZST M8 - 79 x 79 x 1920 - S	8	26.67	1920.0	28.0	72	79	79	71	3	60.0	120.00	16	25	22	33	21	120.0	1680.0	19.7	85.0
MST M8 - 79 x 79 x 213 - SL	8	26.67	213.3	28.0	8	79	79	71												8.9
ZST M10 - 99 x 99 x 1000 - S	10	33.33	1000.0	35.1	30	99	99	89	3	62.5	125.00	8	32	33	48	32	125.0	750.0	19.7	68.7
MST M10 - 79 x 79 x 233 - SL	10	33.33	233.3	28.0	7	79	79	69												10.2
ZST M12 - 120 x 120 x 1000 - S	12	40.00	1000.0	42.6	25	120	120	108	3	40.0	125.00	8	40	39	58	38	125.0	750.0	19.7	111.0
MST M12 - 99 x 99 x 280 - SL	12	40.00	280.0	35.1	7	99	99	87												20.9

<sup>1)</sup> m Module

<sup>3)</sup> n Number of holes

<sup>2)</sup> z Number of teeth

<sup>4)</sup> p<sub>s</sub> End pitch (p<sub>s</sub>=m\*π/cos β)

β = 19.5283° (19°31'42")

any other lengths on request

2.1 Technical principles

Module pitches helical toothed

**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
milled, soft


**Outer surfaces:** ground on all sides

**Quality:** 8 in accordance with DIN 3962, 3963, 3967

**F<sub>p</sub> (mm)** Total pitch deviation

**F<sub>p</sub>/1000 (mm)** 0,150 for a 1000 mm Length

**F<sub>p</sub>/2000 (mm)** 0,225 for a 2000 mm Length

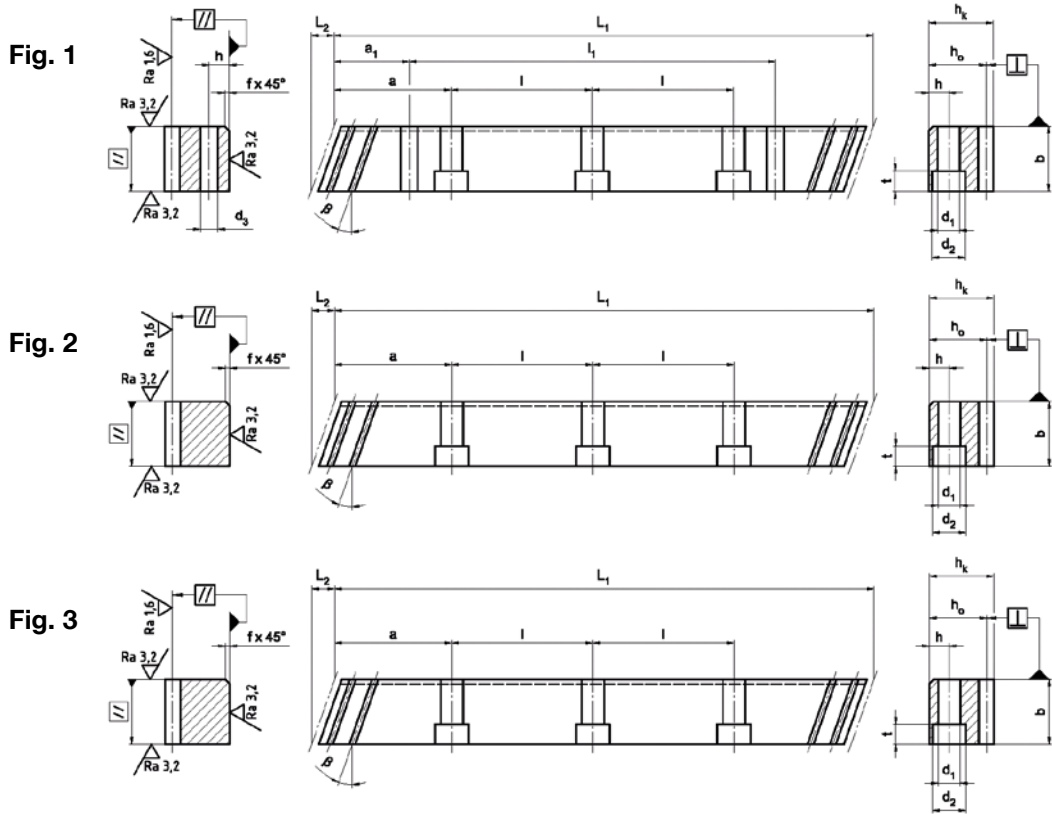

Standard lengths	m <sup>1)</sup>	p <sub>s</sub> <sup>4)</sup>	L <sub>1</sub>	L <sub>2</sub>	z <sup>2)</sup>	b	h <sub>k</sub>	h <sub>o</sub>	f	a	l	n <sup>3)</sup>	h	d <sub>1</sub>	d <sub>2</sub>	t	a <sub>1</sub>	l <sub>1</sub>	d <sub>3</sub>	Dimensions
		mm	mm	mm	-	mm	mm	mm	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	mm	kg
ZST M2 - 24 x 24 x 1000 - S	2	6.67	1000.0	8.5	150	24	24	22	2	62.5	125.00	8	8	7	11	7	31.7	936.6	5.7	4.1
ZST M2 - 24 x 24 x 2000 - S	2	6.67	2000.0	8.5	300	24	24	22	2	62.5	125.00	16	8	7	11	7	31.7	1936.6	5.7	8.2
MST M2 - 24 x 24 x 200 - SL	2	6.67	200.0	8.5	30	24	24	22												0.8
ZST M3 - 29 x 29 x 1000 - S	3	10.00	1000.0	10.3	100	29	29	26	2	62.5	125.00	8	9	10	15	9	35.0	930.0	7.7	5.9
ZST M3 - 29 x 29 x 2000 - S	3	10.00	2000.0	10.3	200	29	29	26	2	62.5	125.00	16	9	10	15	9	35.0	1930.0	7.7	11.8
MST M3 - 29 x 29 x 200 - SL	3	10.00	200.0	10.3	20	29	29	26												1.2
ZST M4 - 39 x 39 x 1000 - S	4	13.33	1000.0	13.8	75	39	39	35	3	62.5	125.00	8	12	10	15	9	33.3	933.4	7.7	10.7
ZST M4 - 39 x 39 x 2000 - S	4	13.33	2000.0	13.8	150	39	39	35	3	62.5	125.00	16	12	10	15	9	33.3	1933.4	7.7	21.4
MST M4 - 39 x 39 x 200 - SL	4	13.33	200.0	13.8	15	39	39	35												2.2
ZST M5 - 49 x 39 x 1000 - S	5	16.67	1000.0	17.4	60	49	39	34	3	62.5	125.00	8	12	14	20	13	37.5	925.0	11.7	13.0
ZST M5 - 49 x 39 x 2000 - S	5	16.67	2000.0	17.4	120	49	39	34	3	62.5	125.00	16	12	14	20	13	37.5	1925.0	11.7	26.0
MST M5 - 49 x 39 x 200 - SL	5	16.67	200.0	17.4	12	49	39	34												2.7
ZST M6 - 59 x 49 x 1000 - S	6	20.00	1000.0	20.9	50	59	49	43	3	62.5	125.00	8	16	18	26	17	37.5	925.0	15.7	18.1
ZST M6 - 59 x 49 x 2000 - S	6	20.00	2000.0	20.9	100	59	49	43	3	62.5	125.00	16	16	18	26	17	37.5	1925.0	15.7	36.2
MST M6 - 59 x 49 x 200 - SL	6	20.00	200.0	20.9	10	59	49	43												3.8
ZST M8 - 79 x 79 x 960 - S	8	26.67	960.0	28.0	36	79	79	71	3	60.0	120.00	8	25	22	33	21	120.0	720.0	19.7	42.5
ZST M8 - 79 x 79 x 1920 - S	8	26.67	1920.0	28.0	72	79	79	71	3	60.0	120.00	16	25	22	33	21	120.0	1680.0	19.7	85.0
MST M8 - 79 x 79 x 213 - SL	8	26.67	213.3	28.0	8	79	79	71												8.9
ZST M10 - 99 x 99 x 1000 - S	10	33.33	1000.0	35.1	30	99	99	89	3	62.5	125.00	8	32	33	48	32	125.0	750.0	19.7	68.7
MST M10 - 79 x 79 x 233 - SL	10	33.33	233.3	28.0	7	79	79	69												10.2
ZST M12 - 120 x 120 x 1000 - S	12	40.00	1000.0	42.6	25	120	120	108	3	40.0	125.00	8	40	39	58	38	125.0	750.0	19.7	111.0
MST M12 - 99 x 99 x 280 - SL	12	40.00	280.0	35.1	7	99	99	87												20.9

<sup>1)</sup> m Module

<sup>3)</sup> n Number of holes

<sup>2)</sup> z Number of teeth

<sup>4)</sup> p<sub>s</sub> End pitch (p<sub>s</sub>=m\*π/cos β)

β = 19.5283° (19°31'42")

any other lengths on request

2.1 Technical principles

Module pitches helical toothed

**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground, nitrided


**Outer surfaces:** ground on all sides

**Quality:** 9 in accordance with DIN 3962, 3963, 3967

**F<sub>p</sub> (mm)** Total pitch deviation

**F<sub>p</sub>/1000 (mm)** 0,180 for a 1000 mm Length

**F<sub>p</sub>/2000 (mm)** 0,270 for a 2000 mm Length

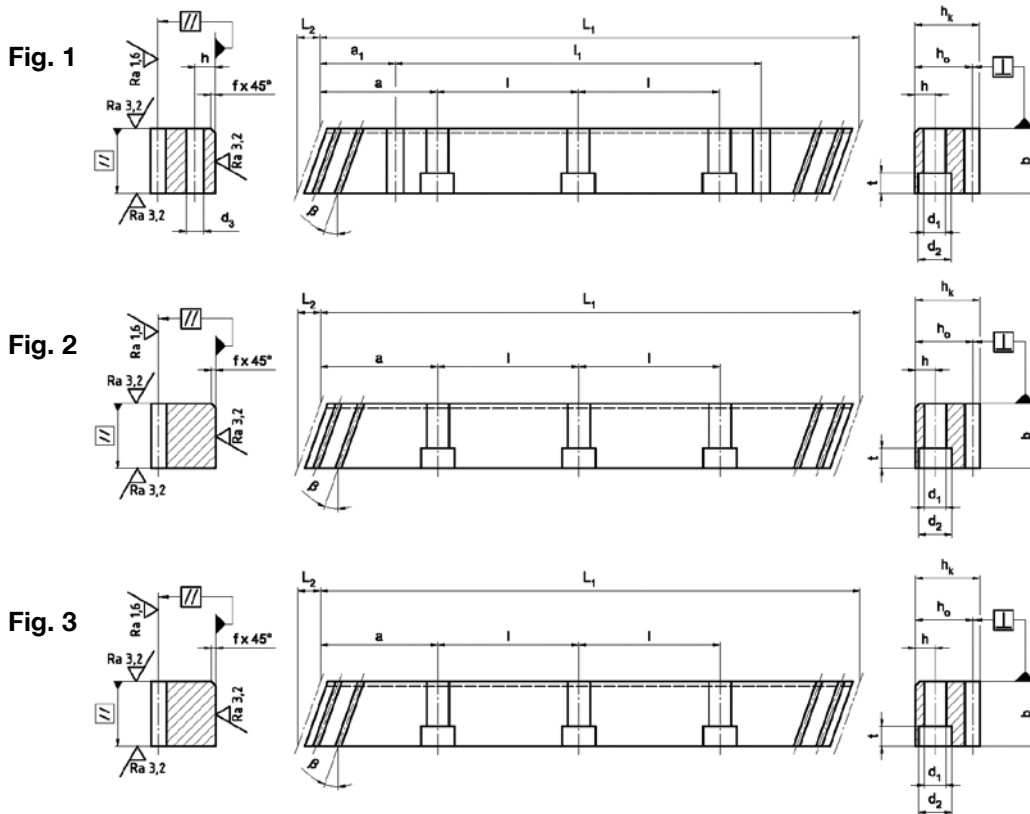

Standard lengths	m <sup>1)</sup>	p <sub>s</sub> <sup>4)</sup>	L <sub>1</sub>	L <sub>2</sub>	z <sup>2)</sup>	b	h <sub>k</sub>	h <sub>0</sub>	f	a	l	n <sup>3)</sup>	h	d <sub>1</sub>	d <sub>2</sub>	t	a <sub>1</sub>	l <sub>1</sub>	d <sub>3</sub>	Dimensions kg
ZST M2 - 24 x 24 x 1000 - S	2	6.67	1000.0	8.5	150	24	24	22	2	62.5	125.00	8	8	7	11	7	31.7	936.6	5.7	4.1
ZST M2 - 24 x 24 x 2000 - S	2	6.67	2000.0	8.5	300	24	24	22	2	62.5	125.00	16	8	7	11	7	31.7	1936.6	5.7	8.2
MST M2 - 24 x 24 x 200 -SL	2	6.67	200.0	8.5	30	24	24	22												0.8
ZST M3 - 29 x 29 x 1000 - S	3	10.00	1000.0	10.3	100	29	29	26	2	62.5	125.00	8	9	10	15	9	35.0	930.0	7.7	5.9
ZST M3 - 29 x 29 x 2000 - S	3	10.00	2000.0	10.3	200	29	29	26	2	62.5	125.00	16	9	10	15	9	35.0	1930.0	7.7	11.8
MST M3 - 29 x 29 x 200 -SL	3	10.00	200.0	10.3	20	29	29	26												1.2
ZST M4 - 39 x 39 x 1000 - S	4	13.33	1000.0	13.8	75	39	39	35	3	62.5	125.00	8	12	10	15	9	33.3	933.4	7.7	10.7
ZST M4 - 39 x 39 x 2000 - S	4	13.33	2000.0	13.8	150	39	39	35	3	62.5	125.00	16	12	10	15	9	33.3	1933.4	7.7	21.4
MST M4 - 39 x 39 x 200 -SL	4	13.33	200.0	13.8	15	39	39	35												2.2
ZST M5 - 49 x 39 x 1000 - S	5	16.67	1000.0	17.4	60	49	39	34	3	62.5	125.00	8	12	14	20	13	37.5	925.0	11.7	13.0
ZST M5 - 49 x 39 x 2000 - S	5	16.67	2000.0	17.4	120	49	39	34	3	62.5	125.00	16	12	14	20	13	37.5	1925.0	11.7	26.0
MST M5 - 49 x 39 x 200 -SL	5	16.67	200.0	17.4	12	49	39	34												2.7
ZST M6 - 59 x 49 x 1000 - S	6	20.00	1000.0	20.9	50	59	49	43	3	62.5	125.00	8	16	18	26	17	37.5	925.0	15.7	18.1
ZST M6 - 59 x 49 x 2000 - S	6	20.00	2000.0	20.9	100	59	49	43	3	62.5	125.00	16	16	18	26	17	37.5	1925.0	15.7	36.2
MST M6 - 59 x 49 x 200 -SL	6	20.00	200.0	20.9	10	59	49	43												3.8
ZST M8 - 79 x 79 x 960 - S	8	26.67	960.0	28.0	36	79	79	71	3	60.0	120.00	8	25	22	33	21	120.0	720.0	19.7	42.5
ZST M8 - 79 x 79 x 1920 - S	8	26.67	1920.0	28.0	72	79	79	71	3	60.0	120.00	16	25	22	33	21	120.0	1680.0	19.7	85.0
MST M8 - 79 x 79 x 213 -SL	8	26.67	213.3	28.0	8	79	79	71												8.9
ZST M10- 99 x 99 x 1000 - S	10	33.33	1000.0	35.1	30	99	99	89	3	62.5	125.00	8	32	33	48	32	125.0	750.0	19.7	68.7
MST M10- 79 x 79 x 233 -SL	10	33.33	233.3	28.0	7	79	79	69												10.2
ZST M12-120 x 120 x 1000 - S	12	40.00	1000.0	42.6	25	120	120	108	3	40.0	125.00	8	40	39	58	38	125.0	750.0	19.7	111.0
MST M12- 99 x 99 x 280 -SL	12	40.00	280.0	35.1	7	99	99	87												20.9

<sup>1)</sup> m Module

<sup>3)</sup> n Number of holes

<sup>2)</sup> z Number of teeth

<sup>4)</sup> p<sub>s</sub> End pitch (p<sub>s</sub>=m\*π/cos β)

β = 19.5283° (19°31'42")

any other lengths on request

## 2.1 Technical principles

### Module pitches helical toothed

**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
milled, induction hardened


**Outer surfaces:** ground on all sides

**Quality:** 11 in accordance with DIN 3962, 3963, 3967

**F<sub>p</sub> (mm)** Total pitch deviation

**F<sub>p</sub>/1000 (mm)** 0,220 for a 1000 mm Length

**F<sub>p</sub>/2000 (mm)** 0,330 for a 2000 mm Length

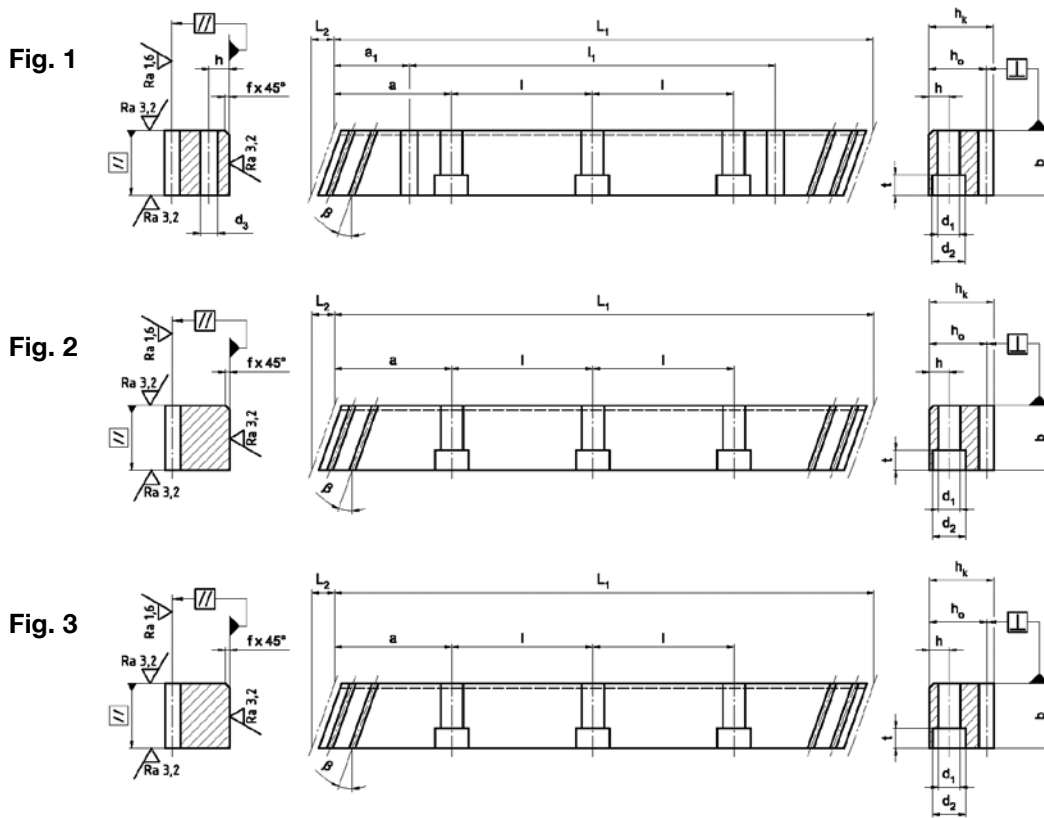

Standard lengths	m <sup>1)</sup>		L <sub>1</sub> mm	L <sub>2</sub> mm	z <sup>2)</sup>	b mm	h <sub>k</sub> mm	h <sub>0</sub> mm	f mm	a mm	l mm	n <sup>3)</sup>	h mm	d <sub>1</sub> mm	d <sub>2</sub> mm	t mm	a <sub>1</sub> mm	l <sub>1</sub> mm	d <sub>3</sub> mm	Dimensions
	-	p <sub>s</sub> <sup>4)</sup> mm																		kg
ZST M2 - 24 x 24 x 1000 - S	2	6.67	1000.0	8.5	150	24	24	22	2	62.5	125.00	8	8	7	11	7	31.7	936.6	5.7	4.1
ZST M2 - 24 x 24 x 2000 - S	2	6.67	2000.0	8.5	300	24	24	22	2	62.5	125.00	16	8	7	11	7	31.7	1936.6	5.7	8.2
MST M2 - 24 x 24 x 200 - SL	2	6.67	200.0	8.5	30	24	24	22												0.8
ZST M3 - 29 x 29 x 1000 - S	3	10.00	1000.0	10.3	100	29	29	26	2	62.5	125.00	8	9	10	15	9	35.0	930.0	7.7	5.9
ZST M3 - 29 x 29 x 2000 - S	3	10.00	2000.0	10.3	200	29	29	26	2	62.5	125.00	16	9	10	15	9	35.0	1930.0	7.7	11.8
MST M3 - 29 x 29 x 200 - SL	3	10.00	200.0	10.3	20	29	29	26												1.2
ZST M4 - 39 x 39 x 1000 - S	4	13.33	1000.0	13.8	75	39	39	35	3	62.5	125.00	8	12	10	15	9	33.3	933.4	7.7	10.7
ZST M4 - 39 x 39 x 2000 - S	4	13.33	2000.0	13.8	150	39	39	35	3	62.5	125.00	16	12	10	15	9	33.3	1933.4	7.7	21.4
MST M4 - 39 x 39 x 200 - SL	4	13.33	200.0	13.8	15	39	39	35												2.2
ZST M5 - 49 x 39 x 1000 - S	5	16.67	1000.0	17.4	60	49	39	34	3	62.5	125.00	8	12	14	20	13	37.5	925.0	11.7	13.0
ZST M5 - 49 x 39 x 2000 - S	5	16.67	2000.0	17.4	120	49	39	34	3	62.5	125.00	16	12	14	20	13	37.5	1925.0	11.7	26.0
MST M5 - 49 x 39 x 200 - SL	5	16.67	200.0	17.4	12	49	39	34												2.7
ZST M6 - 59 x 49 x 1000 - S	6	20.00	1000.0	20.9	50	59	49	43	3	62.5	125.00	8	16	18	26	17	37.5	925.0	15.7	18.1
ZST M6 - 59 x 49 x 2000 - S	6	20.00	2000.0	20.9	100	59	49	43	3	62.5	125.00	16	16	18	26	17	37.5	1925.0	15.7	36.2
MST M6 - 59 x 49 x 200 - SL	6	20.00	200.0	20.9	10	59	49	43												3.8
ZST M8 - 79 x 79 x 960 - S	8	26.67	960.0	28.0	36	79	79	71	3	60.0	120.00	8	25	22	33	21	120.0	720.0	19.7	42.5
ZST M8 - 79 x 79 x 1920 - S	8	26.67	1920.0	28.0	72	79	79	71	3	60.0	120.00	16	25	22	33	21	120.0	1680.0	19.7	85.0
MST M8 - 79 x 79 x 213 - SL	8	26.67	213.3	28.0	8	79	79	71												8.9
ZST M10 - 99 x 99 x 1000 - S	10	33.33	1000.0	35.1	30	99	99	89	3	62.5	125.00	8	32	33	48	32	125.0	750.0	19.7	68.7
MST M10 - 79 x 79 x 233 - SL	10	33.33	233.3	28.0	7	79	79	69												10.2
ZST M12 - 120 x 120 x 1000 - S	12	40.00	1000.0	42.6	25	120	120	108	3	40.0	125.00	8	40	39	58	38	125.0	750.0	19.7	111.0
MST M12 - 99 x 99 x 280 - SL	12	40.00	280.0	35.1	7	99	99	87												20.9

<sup>1)</sup> m Module

<sup>3)</sup> n Number of holes

<sup>2)</sup> z Number of teeth

<sup>4)</sup> p<sub>s</sub> End pitch (p<sub>s</sub>=m\*π/cos β)

β = 19.5283° (19°31'42")

any other lengths on request



2.2 Technical principles

Module pitches straight toothed


**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground, soft or hardened

**Outer surfaces:** ground on all sides

**Quality:** 4 in accordance with DIN 3962, 3963, 3967

**$f_p$  (mm)** Single pitch deviation  
Module  $\leq 3$ : 0.003  
Module  $> 3$ : 0.004

**$F_p$  (mm)** Total pitch deviation  
 **$F_p/1000$  (mm)** 0,015 for a 1000 mm Length

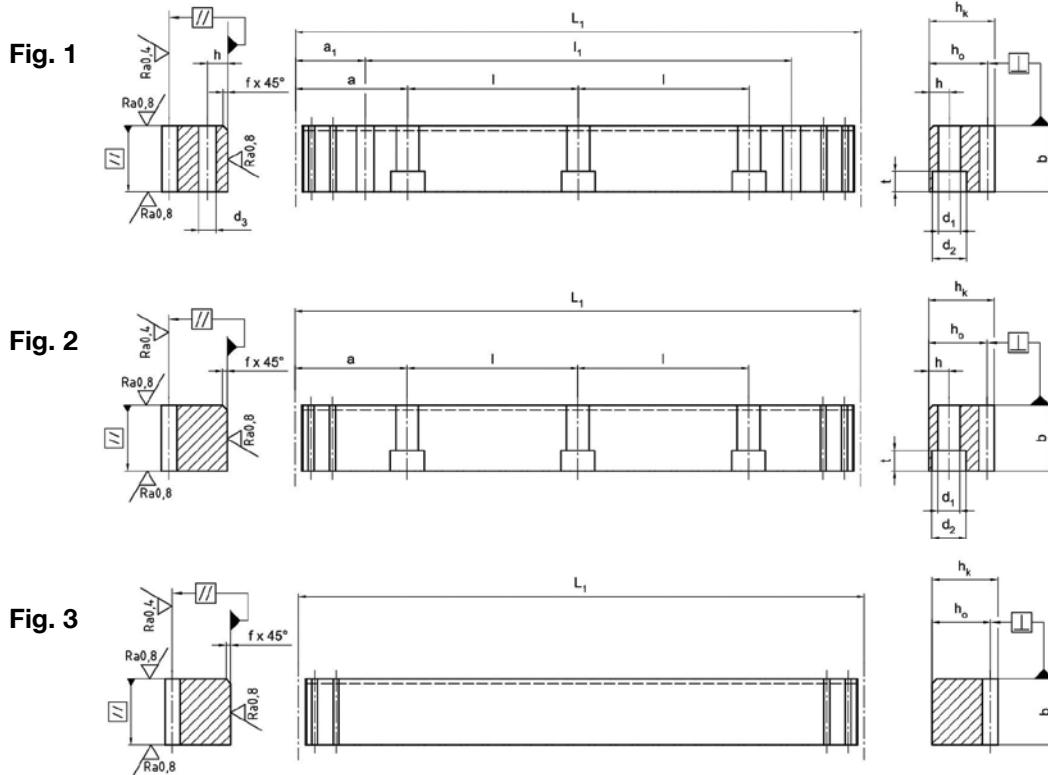

Standard lengths	m <sup>1)</sup>	p <sup>4)</sup>	L <sub>1</sub>	z <sup>2)</sup>	b	h <sub>k</sub>	h <sub>o</sub>	f	a	l	n <sup>3)</sup>	h	d <sub>1</sub>	d <sub>2</sub>	t	a <sub>1</sub>	l <sub>1</sub>	d <sub>3</sub>	Dimensions
	-	mm	mm	-	mm	mm	mm	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	mm	kg
ZST M2 - 24 x 24 x 1005 - G	2	6.28	1005.3	160	24	24	22	2	62.8	125.66	8	8	7	11	7	31.3	942.7	5.7	4.2
ZST M2 - 24 x 24 x 2010 - G	2	6.28	2010.6	320	24	24	22	2	62.8	125.66	16	8	7	11	7	31.3	1948.0	5.7	8.4
MST M2 - 24 x 24 x 201 - G	2	6.28	201.0	32	24	24	22												0.8
ZST M3 - 29 x 29 x 1017 - G	3	9.42	1017.9	108	29	29	26	2	63.6	127.23	8	9	10	15	9	34.4	949.1	7.7	6.0
ZST M3 - 29 x 29 x 2035 - G	3	9.42	2035.8	216	29	29	26	2	63.6	127.23	16	9	10	15	9	34.4	1967.0	7.7	12.0
MST M3 - 29 x 29 x 198 - G	3	9.42	198.0	21	29	29	26												1.2
ZST M4 - 39 x 39 x 1005 - G	4	12.57	1005.3	80	39	39	35	3	62.8	125.66	8	12	10	15	9	37.5	930.3	7.7	10.7
ZST M4 - 39 x 39 x 2010 - G	4	12.57	2010.6	160	39	39	35	3	62.8	125.66	16	12	10	15	9	37.5	1935.6	7.7	21.4
MST M4 - 39 x 39 x 201 - G	4	12.57	201.0	16	39	39	35												2.2
ZST M5 - 49 x 39 x 1005 - G	5	15.71	1005.3	64	49	39	34	3	62.8	125.66	8	12	14	20	13	30.1	945.0	11.7	13.1
ZST M5 - 49 x 39 x 2010 - G	5	15.71	2010.6	128	49	39	34	3	62.8	125.66	16	12	14	20	13	30.1	1950.4	11.7	26.2
MST M5 - 49 x 39 x 204 - G	5	15.71	204.0	13	49	39	34												2.7
ZST M6 - 59 x 49 x 1017 - G	6	18.85	1017.9	54	59	49	43	3	63.6	127.23	8	16	18	26	17	31.4	955.0	15.7	20.2
ZST M6 - 59 x 49 x 2035 - G	6	18.85	2035.8	108	59	49	43	3	63.6	127.23	16	16	18	26	17	31.4	1973.0	15.7	40.4
MST M6 - 59 x 49 x 207 - G	6	18.85	207.0	11	59	49	43												4.1
ZST M8 - 79 x 79 x 1005 - G	8	25.13	1005.3	40	79	79	71	3	62.8	125.66	8	25	22	33	21	26.6	952.0	19.7	44.3
ZST M8 - 79 x 79 x 2010 - G	8	25.13	2010.6	80	79	79	71	3	62.8	125.66	16	25	22	33	21	26.6	1957.3	19.7	88.6
MST M8 - 79 x 79 x 201 - G	8	25.13	201.0	8	79	79	71												8.9
ZST M10 - 99 x 99 x 1005 - G	10	31.42	1005.3	32	99	99	89	3	62.8	125.66	8	32	33	48	32	125.7	754.0	19.7	68.7
MST M10 - 79 x 79 x 219 - G	10	31.42	219.0	7	79	79	69												10.2
ZST M12 - 120 x 120 x 1017 - G	12	37.70	1017.9	27	120	120	108	3	63.6	127.23	8	40	39	58	38	127.2	763.4	19.7	109.0
MST M12 - 99 x 99 x 263 - G	12	37.70	263.0	7	99	99	87												19.0

<sup>1)</sup> m Module      <sup>3)</sup> n Number of holes  
<sup>2)</sup> z Number of teeth      <sup>4)</sup> p Pitch (p=m\*π)

any other lengths on request



2.2 Technical principles

Module pitches straight toothed

**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground, soft or hardened

**Outer surfaces:** ground on all sides

**Quality:** 5 in accordance with DIN 3962, 3963, 3967  
 $f_p$  (mm) Single pitch deviation  
Module  $\leq 3$ : 0,004  
Module  $> 3$ : 0,005

$F_p$  (mm) Total pitch deviation  
 $F_p/1000$  (mm) 0.024 for a 1000 mm length  
 $F_p/2000$  (mm) 0.032 for a 2000 mm length

Fig. 1

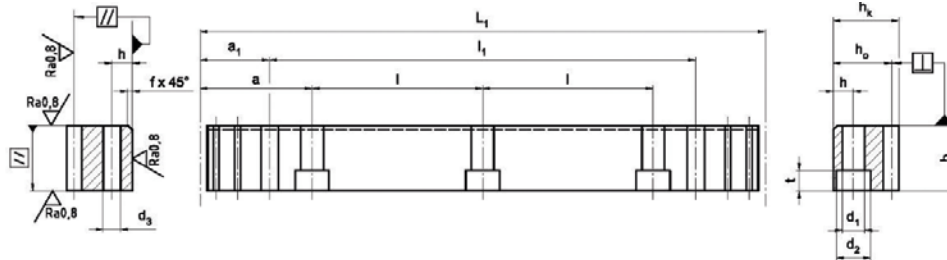


Fig. 2


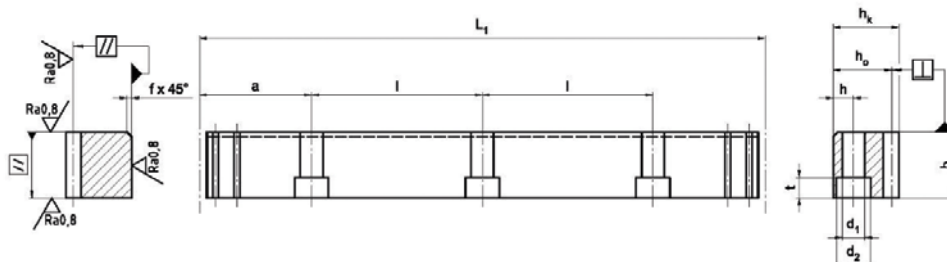


Fig. 3

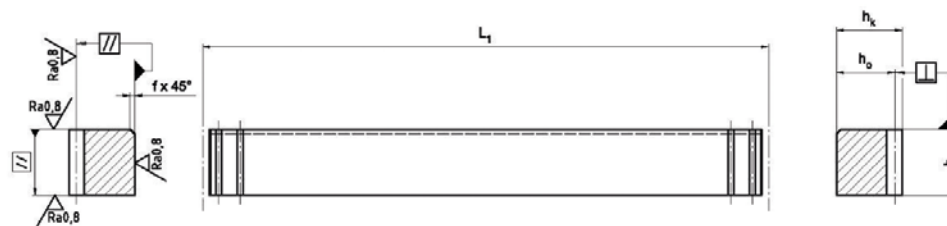

Standard lengths	m <sup>1)</sup>	p <sup>4)</sup> mm	L <sub>1</sub> mm	z <sup>2)</sup>	b mm	h <sub>k</sub> mm	h <sub>o</sub> mm	f mm	a mm	l mm	n <sup>3)</sup>	h mm	d <sub>1</sub> mm	d <sub>2</sub> mm	t mm	a <sub>1</sub> mm	l <sub>1</sub> mm	d <sub>3</sub> mm	Dimensions kg
ZST M2 - 24 x 24 x 1005 - G	2	6.28	1005.3	160	24	24	22	2	62.8	125.66	8	8	7	11	7	31.3	942.7	5.7	4.2
ZST M2 - 24 x 24 x 2010 - G	2	6.28	2010.6	320	24	24	22	2	62.8	125.66	16	8	7	11	7	31.3	1948.0	5.7	8.4
MST M2 - 24 x 24 x 201 - G	2	6.28	201.0	32	24	24	22												0.8
ZST M3 - 29 x 29 x 1017 - G	3	9.42	1017.9	108	29	29	26	2	63.6	127.23	8	9	10	15	9	34.4	949.1	7.7	6.0
ZST M3 - 29 x 29 x 2035 - G	3	9.42	2035.8	216	29	29	26	2	63.6	127.23	16	9	10	15	9	34.4	1967.0	7.7	12.0
MST M3 - 29 x 29 x 198 - G	3	9.42	198.0	21	29	29	26												1.2
ZST M4 - 39 x 39 x 1005 - G	4	12.57	1005.3	80	39	39	35	3	62.8	125.66	8	12	10	15	9	37.5	930.3	7.7	10.7
ZST M4 - 39 x 39 x 2010 - G	4	12.57	2010.6	160	39	39	35	3	62.8	125.66	16	12	10	15	9	37.5	1935.6	7.7	21.4
MST M4 - 39 x 39 x 201 - G	4	12.57	201.0	16	39	39	35												2.2
ZST M5 - 49 x 39 x 1005 - G	5	15.71	1005.3	64	49	39	34	3	62.8	125.66	8	12	14	20	13	30.1	945.0	11.7	13.1
ZST M5 - 49 x 39 x 2010 - G	5	15.71	2010.6	128	49	39	34	3	62.8	125.66	16	12	14	20	13	30.1	1950.4	11.7	26.2
MST M5 - 49 x 39 x 204 - G	5	15.71	204.0	13	49	39	34												2.7
ZST M6 - 59 x 49 x 1017 - G	6	18.85	1017.9	54	59	49	43	3	63.6	127.23	8	16	18	26	17	31.4	955.0	15.7	20.2
ZST M6 - 59 x 49 x 2035 - G	6	18.85	2035.8	108	59	49	43	3	63.6	127.23	16	16	18	26	17	31.4	1973.0	15.7	40.4
MST M6 - 59 x 49 x 207 - G	6	18.85	207.0	11	59	49	43												4.1
ZST M8 - 79 x 79 x 1005 - G	8	25.13	1005.3	40	79	79	71	3	62.8	125.66	8	25	22	33	21	26.6	952.0	19.7	44.3
ZST M8 - 79 x 79 x 2010 - G	8	25.13	2010.6	80	79	79	71	3	62.8	125.66	16	25	22	33	21	26.6	1957.3	19.7	88.6
MST M8 - 79 x 79 x 201 - G	8	25.13	201.0	8	79	79	71												8.9
ZST M10 - 99 x 99 x 1005 - G	10	31.42	1005.3	32	99	99	89	3	62.8	125.66	8	32	33	48	32	125.7	754.0	19.7	68.7
MST M10 - 79 x 79 x 219 - G	10	31.42	219.0	7	79	79	69												10.2
ZST M12 - 120 x 120 x 1017 - G	12	37.70	1017.9	27	120	120	108	3	63.6	127.23	8	40	39	58	38	127.2	763.4	19.7	109.0
MST M12 - 99 x 99 x 263 - G	12	37.70	263.0	7	99	99	87												19.0

<sup>1)</sup> m Module                      <sup>3)</sup> n Number of holes

<sup>2)</sup> z Number of teeth           <sup>4)</sup> p Pitch (p=m\*π)

any other lengths on request

2.2 Technical principles

Module pitches straight toothed


**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground, soft or hardened

**Outer surfaces:** ground on all sides

**Quality:** 6 in accordance with DIN 3962, 3963, 3967

**$f_p$  (mm)** Single pitch deviation  
Module  $\leq 3$ : 0.006  
Module  $> 3$ : 0.008

**$F_p$  (mm)** Total pitch deviation  
 **$F_p/1000$  (mm)** 0,035 for a 1000 mm Length  
 **$F_p/2000$  (mm)** 0,045 for a 2000 mm Length

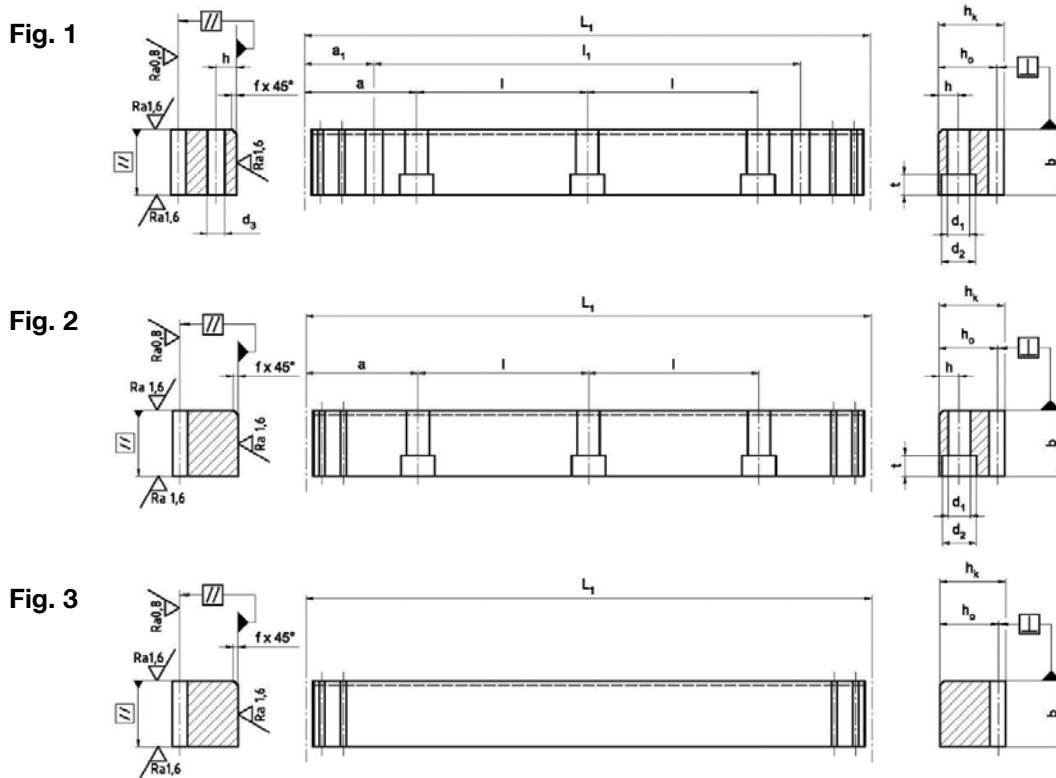

Standard lengths	m <sup>1)</sup>	p <sup>4)</sup>	L <sub>1</sub>	z <sup>2)</sup>	b	h <sub>k</sub>	h <sub>0</sub>	f	a	l	n <sup>3)</sup>	h	d <sub>1</sub>	d <sub>2</sub>	t	a <sub>1</sub>	l <sub>1</sub>	d <sub>3</sub>	Dimensions
	-	mm	mm	-	mm	mm	mm	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	mm	kg
ZST M2 - 24 x 24 x 1005 - G	2	6.28	1005.3	160	24	24	22	2	62.8	125.66	8	8	7	11	7	31.3	942.7	5.7	4.2
ZST M2 - 24 x 24 x 2010 - G	2	6.28	2010.6	320	24	24	22	2	62.8	125.66	16	8	7	11	7	31.3	1948.0	5.7	8.4
MST M2 - 24 x 24 x 201 - G	2	6.28	201.0	32	24	24	22												0.8
ZST M3 - 29 x 29 x 1017 - G	3	9.42	1017.9	108	29	29	26	2	63.6	127.23	8	9	10	15	9	34.4	949.1	7.7	6.0
ZST M3 - 29 x 29 x 2035 - G	3	9.42	2035.8	216	29	29	26	2	63.6	127.23	16	9	10	15	9	34.4	1967.0	7.7	12.0
MST M3 - 29 x 29 x 198 - G	3	9.42	198.0	21	29	29	26												1.2
ZST M4 - 39 x 39 x 1005 - G	4	12.57	1005.3	80	39	39	35	3	62.8	125.66	8	12	10	15	9	37.5	930.3	7.7	10.7
ZST M4 - 39 x 39 x 2010 - G	4	12.57	2010.6	160	39	39	35	3	62.8	125.66	16	12	10	15	9	37.5	1935.6	7.7	21.4
MST M4 - 39 x 39 x 201 - G	4	12.57	201.0	16	39	39	35												2.2
ZST M5 - 49 x 39 x 1005 - G	5	15.71	1005.3	64	49	39	34	3	62.8	125.66	8	12	14	20	13	30.1	945.0	11.7	13.1
ZST M5 - 49 x 39 x 2010 - G	5	15.71	2010.6	128	49	39	34	3	62.8	125.66	16	12	14	20	13	30.1	1950.4	11.7	26.2
MST M5 - 49 x 39 x 204 - G	5	15.71	204.0	13	49	39	34												2.7
ZST M6 - 59 x 49 x 1017 - G	6	18.85	1017.9	54	59	49	43	3	63.6	127.23	8	16	18	26	17	31.4	955.0	15.7	20.2
ZST M6 - 59 x 49 x 2035 - G	6	18.85	2035.8	108	59	49	43	3	63.6	127.23	16	16	18	26	17	31.4	1973.0	15.7	40.4
MST M6 - 59 x 49 x 207 - G	6	18.85	207.0	11	59	49	43												4.1
ZST M8 - 79 x 79 x 1005 - G	8	25.13	1005.3	40	79	79	71	3	62.8	125.66	8	25	22	33	21	26.6	952.0	19.7	44.3
ZST M8 - 79 x 79 x 2010 - G	8	25.13	2010.6	80	79	79	71	3	62.8	125.66	16	25	22	33	21	26.6	1957.3	19.7	88.6
MST M8 - 79 x 79 x 201 - G	8	25.13	201.0	8	79	79	71												8.9
ZST M10 - 99 x 99 x 1005 - G	10	31.42	1005.3	32	99	99	89	3	62.8	125.66	8	32	33	48	32	125.7	754.0	19.7	68.7
MST M10 - 79 x 79 x 219 - G	10	31.42	219.0	7	79	79	69												10.2
ZST M12 - 120 x 120 x 1017 - G	12	37.70	1017.9	27	120	120	108	3	63.6	127.23	8	40	39	58	38	127.2	763.4	19.7	109.0
MST M12 - 99 x 99 x 263 - G	12	37.70	263.0	7	99	99	87												19.0

<sup>1)</sup> m Module      <sup>3)</sup> n Number of holes  
<sup>2)</sup> z Number of teeth      <sup>4)</sup> p Pitch (p=m\*π)

any other lengths on request

## 2.2 Technical principles

### Module pitches straight toothed




**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground, soft or hardened

**Outer surfaces:** ground on all sides

**Quality:** 7 in accordance with DIN 3962, 3963, 3967

**$f_p$  (mm)** Single pitch deviation  
Module  $\leq 3$ : 0,007  
Module  $> 3$ : 0,009

**$F_p$  (mm)** Total pitch deviation  
 **$F_p/1000$  (mm)** 0.060 for a 1000 mm length  
 **$F_p/2000$  (mm)** 0.075 for a 2000 mm length

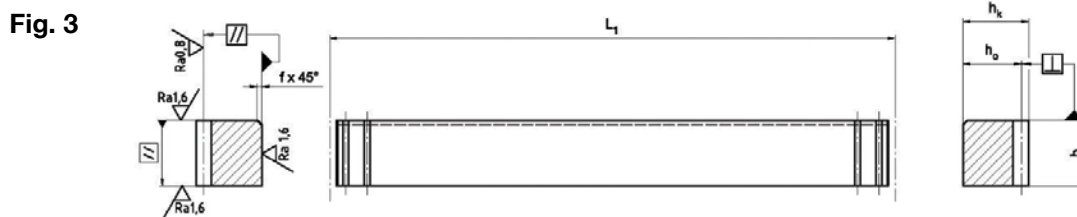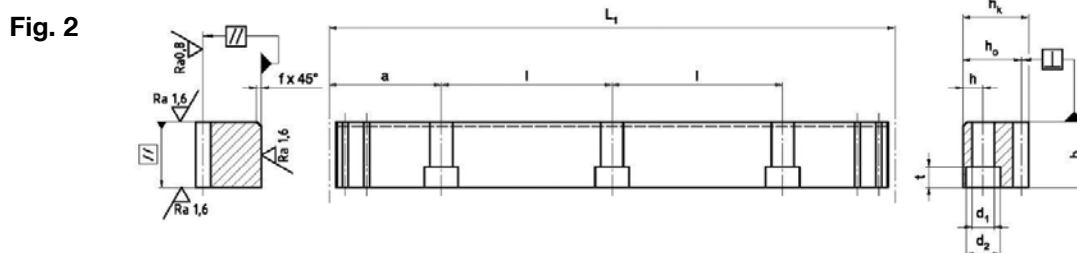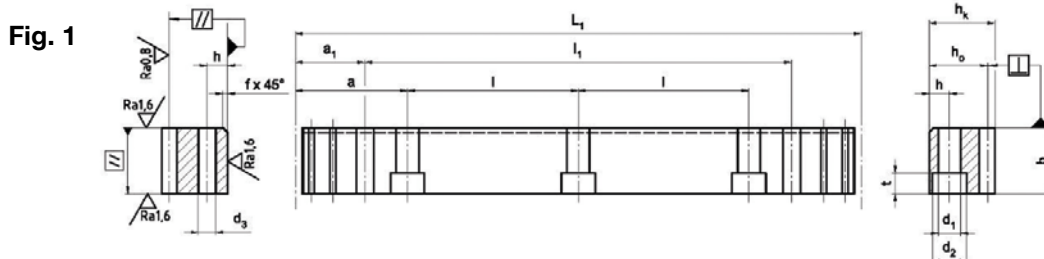

Standard lengths	m <sup>1)</sup>	p <sup>4)</sup>	L <sub>1</sub>	z <sup>2)</sup>	b	h <sub>k</sub>	h <sub>o</sub>	f	a	l	n <sup>3)</sup>	h	d <sub>1</sub>	d <sub>2</sub>	t	a <sub>1</sub>	l <sub>1</sub>	d <sub>3</sub>	Dimensions
	-	mm	mm	-	mm	mm	mm	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	mm	kg
ZST M2 - 24 x 24 x 1005 - G	2	6.28	1005.3	160	24	24	22	2	62.8	125.66	8	8	7	11	7	31.3	942.7	5.7	4.2
ZST M2 - 24 x 24 x 2010 - G	2	6.28	2010.6	320	24	24	22	2	62.8	125.66	16	8	7	11	7	31.3	1948.0	5.7	8.4
MST M2 - 24 x 24 x 201 - G	2	6.28	201.0	32	24	24	22												0.8
ZST M3 - 29 x 29 x 1017 - G	3	9.42	1017.9	108	29	29	26	2	63.6	127.23	8	9	10	15	9	34.4	949.1	7.7	6.0
ZST M3 - 29 x 29 x 2035 - G	3	9.42	2035.8	216	29	29	26	2	63.6	127.23	16	9	10	15	9	34.4	1967.0	7.7	12.0
MST M3 - 29 x 29 x 198 - G	3	9.42	198.0	21	29	29	26												1.2
ZST M4 - 39 x 39 x 1005 - G	4	12.57	1005.3	80	39	39	35	3	62.8	125.66	8	12	10	15	9	37.5	930.3	7.7	10.7
ZST M4 - 39 x 39 x 2010 - G	4	12.57	2010.6	160	39	39	35	3	62.8	125.66	16	12	10	15	9	37.5	1935.6	7.7	21.4
MST M4 - 39 x 39 x 201 - G	4	12.57	201.0	16	39	39	35												2.2
ZST M5 - 49 x 39 x 1005 - G	5	15.71	1005.3	64	49	39	34	3	62.8	125.66	8	12	14	20	13	30.1	945.0	11.7	13.1
ZST M5 - 49 x 39 x 2010 - G	5	15.71	2010.6	128	49	39	34	3	62.8	125.66	16	12	14	20	13	30.1	1950.4	11.7	26.2
MST M5 - 49 x 39 x 204 - G	5	15.71	204.0	13	49	39	34												2.7
ZST M6 - 59 x 49 x 1017 - G	6	18.85	1017.9	54	59	49	43	3	63.6	127.23	8	16	18	26	17	31.4	955.0	15.7	20.2
ZST M6 - 59 x 49 x 2035 - G	6	18.85	2035.8	108	59	49	43	3	63.6	127.23	16	16	18	26	17	31.4	1973.0	15.7	40.4
MST M6 - 59 x 49 x 207 - G	6	18.85	207.0	11	59	49	43												4.1
ZST M8 - 79 x 79 x 1005 - G	8	25.13	1005.3	40	79	79	71	3	62.8	125.66	8	25	22	33	21	26.6	952.0	19.7	44.3
ZST M8 - 79 x 79 x 2010 - G	8	25.13	2010.6	80	79	79	71	3	62.8	125.66	16	25	22	33	21	26.6	1957.3	19.7	88.6
MST M8 - 79 x 79 x 201 - G	8	25.13	201.0	8	79	79	71												8.9
ZST M10 - 99 x 99 x 1005 - G	10	31.42	1005.3	32	99	99	89	3	62.8	125.66	8	32	33	48	32	125.7	754.0	19.7	68.7
MST M10 - 79 x 79 x 219 - G	10	31.42	219.0	7	79	79	69												10.2
ZST M12 - 120 x 120 x 1017 - G	12	37.70	1017.9	27	120	120	108	3	63.6	127.23	8	40	39	58	38	127.2	763.4	19.7	109.0
MST M12 - 99 x 99 x 263 - G	12	37.70	263.0	7	99	99	87												19.0

<sup>1)</sup> m Module

<sup>3)</sup> n Number of holes

<sup>2)</sup> z Number of teeth

<sup>4)</sup> p Pitch ( $p=m \cdot \pi$ )

any other lengths on request

2.2 Technical principles

Module pitches straight toothed

**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
milled, soft

**Outer surfaces:** ground on all sides

**Quality:** 8 in accordance with DIN 3962, 3963, 3967

**F<sub>p</sub> (mm)** Total pitch deviation

**F<sub>p</sub>/1000 (mm)** 0,150 for a 1000 mm Length

**F<sub>p</sub>/2000 (mm)** 0,225 for a 2000 mm Length

Fig. 1

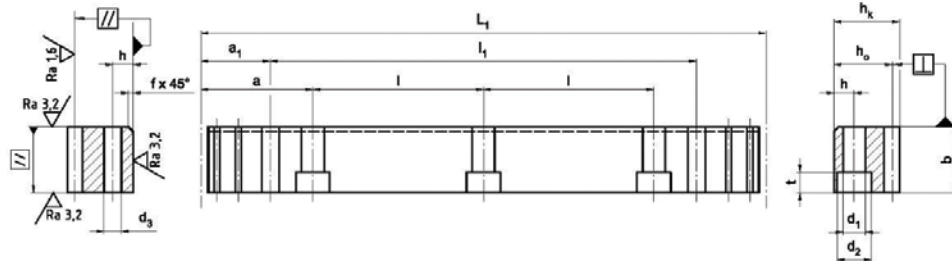


Fig. 2


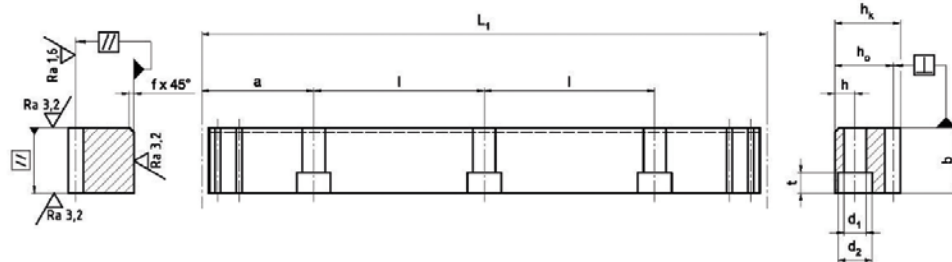


Fig. 3

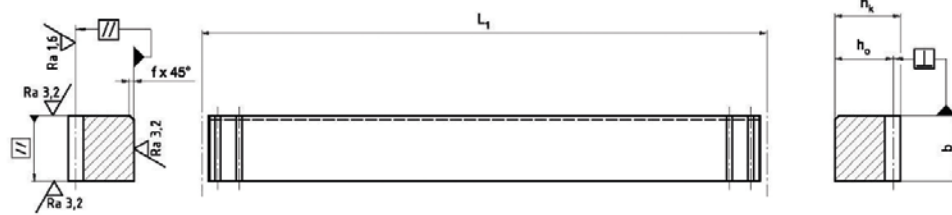

Standard lengths	m <sup>1)</sup>	p <sup>4)</sup>	L <sub>1</sub>	z <sup>2)</sup>	b	h <sub>k</sub>	h <sub>o</sub>	f	a	l	n <sup>3)</sup>	h	d <sub>1</sub>	d <sub>2</sub>	t	a <sub>1</sub>	l <sub>1</sub>	d <sub>3</sub>	Dimensions
	-	mm	mm	-	mm	mm	mm	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	mm	kg
ZST M2 - 24 x 24 x 1005 - G	2	6.28	1005.3	160	24	24	22	2	62.8	125.66	8	8	7	11	7	31.3	942.7	5.7	4.2
ZST M2 - 24 x 24 x 2010 - G	2	6.28	2010.6	320	24	24	22	2	62.8	125.66	16	8	7	11	7	31.3	1948.0	5.7	8.4
MST M2 - 24 x 24 x 201 - G	2	6.28	201.0	32	24	24	22												0.8
ZST M3 - 29 x 29 x 1017 - G	3	9.42	1017.9	108	29	29	26	2	63.6	127.23	8	9	10	15	9	34.4	949.1	7.7	6.0
ZST M3 - 29 x 29 x 2035 - G	3	9.42	2035.8	216	29	29	26	2	63.6	127.23	16	9	10	15	9	34.4	1967.0	7.7	12.0
MST M3 - 29 x 29 x 198 - G	3	9.42	198.0	21	29	29	26												1.2
ZST M4 - 39 x 39 x 1005 - G	4	12.57	1005.3	80	39	39	35	3	62.8	125.66	8	12	10	15	9	37.5	930.3	7.7	10.7
ZST M4 - 39 x 39 x 2010 - G	4	12.57	2010.6	160	39	39	35	3	62.8	125.66	16	12	10	15	9	37.5	1935.6	7.7	21.4
MST M4 - 39 x 39 x 201 - G	4	12.57	201.0	16	39	39	35												2.2
ZST M5 - 49 x 39 x 1005 - G	5	15.71	1005.3	64	49	39	34	3	62.8	125.66	8	12	14	20	13	30.1	945.0	11.7	13.1
ZST M5 - 49 x 39 x 2010 - G	5	15.71	2010.6	128	49	39	34	3	62.8	125.66	16	12	14	20	13	30.1	1950.4	11.7	26.2
MST M5 - 49 x 39 x 204 - G	5	15.71	204.0	13	49	39	34												2.7
ZST M6 - 59 x 49 x 1017 - G	6	18.85	1017.9	54	59	49	43	3	63.6	127.23	8	16	18	26	17	31.4	955.0	15.7	20.2
ZST M6 - 59 x 49 x 2035 - G	6	18.85	2035.8	108	59	49	43	3	63.6	127.23	16	16	18	26	17	31.4	1973.0	15.7	40.4
MST M6 - 59 x 49 x 207 - G	6	18.85	207.0	11	59	49	43												4.1
ZST M8 - 79 x 79 x 1005 - G	8	25.13	1005.3	40	79	79	71	3	62.8	125.66	8	25	22	33	21	26.6	952.0	19.7	44.3
ZST M8 - 79 x 79 x 2010 - G	8	25.13	2010.6	80	79	79	71	3	62.8	125.66	16	25	22	33	21	26.6	1957.3	19.7	88.6
MST M8 - 79 x 79 x 201 - G	8	25.13	201.0	8	79	79	71												8.9
ZST M10- 99 x 99 x 1005 - G	10	31.42	1005.3	32	99	99	89	3	62.8	125.66	8	32	33	48	32	125.7	754.0	19.7	68.7
MST M10- 79 x 79 x 219 - G	10	31.42	219.0	7	79	79	69												10.2
ZST M12- 120 x 120 x 1017 - G	12	37.70	1017.9	27	120	120	108	3	63.6	127.23	8	40	39	58	38	127.2	763.4	19.7	109.0
MST M12- 99 x 99 x 263 - G	12	37.70	263.0	7	99	99	87												19.0

<sup>1)</sup> m Module      <sup>3)</sup> n Number of holes  
<sup>2)</sup> z Number of teeth      <sup>4)</sup> p Pitch (p=m\*π)

any other lengths on request

2.2 Technical principles

Module pitches straight toothed

**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground, nitrided

**Outer surfaces:** ground on all sides

**Quality:** 9 in accordance with DIN 3962, 3963, 3967

$F_p$  (mm) Total pitch deviation

$F_p/1000$  (mm) 0.180 for a 1000 mm Length

$F_p/2000$  (mm) 0.270 for a 2000 mm Length

Fig. 1

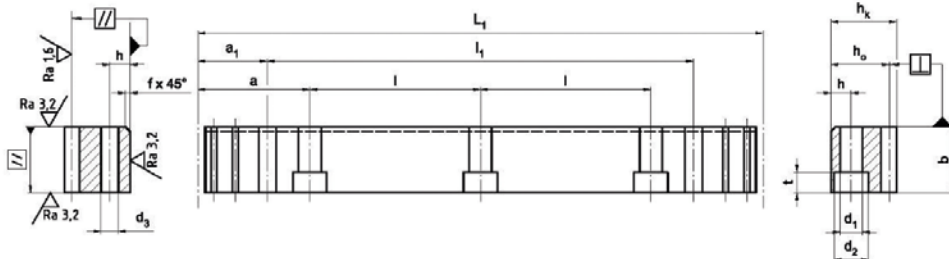


Fig. 2


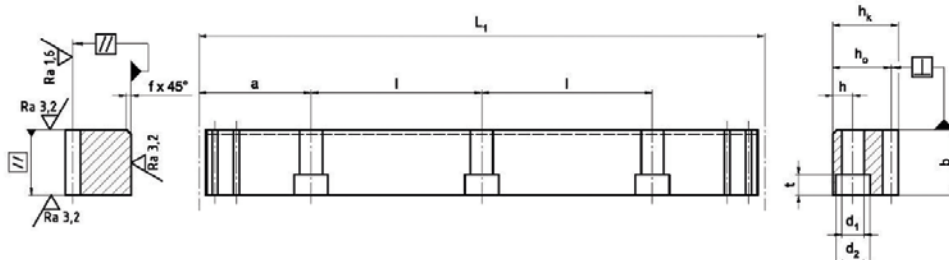


Fig. 3

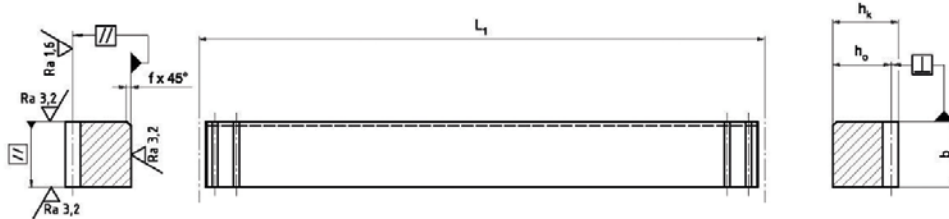

Standard lengths	m <sup>1)</sup> -	p <sup>4)</sup> mm	L <sub>1</sub> mm	z <sup>2)</sup> -	b mm	h <sub>k</sub> mm	h <sub>0</sub> mm	f mm	a mm	l mm	n <sup>3)</sup> -	h mm	d <sub>1</sub> mm	d <sub>2</sub> mm	t mm	a <sub>1</sub> mm	l <sub>1</sub> mm	d <sub>3</sub> mm	Dimensions kg
ZST M2 - 24 x 24 x 1005 - G	2	6.28	1005.3	160	24	24	22	2	62.8	125.66	8	8	7	11	7	31.3	942.7	5.7	4.2
ZST M2 - 24 x 24 x 2010 - G	2	6.28	2010.6	320	24	24	22	2	62.8	125.66	16	8	7	11	7	31.3	1948.0	5.7	8.4
MST M2 - 24 x 24 x 201 - G	2	6.28	201.0	32	24	24	22												0.8
ZST M3 - 29 x 29 x 1017 - G	3	9.42	1017.9	108	29	29	26	2	63.6	127.23	8	9	10	15	9	34.4	949.1	7.7	6.0
ZST M3 - 29 x 29 x 2035 - G	3	9.42	2035.8	216	29	29	26	2	63.6	127.23	16	9	10	15	9	34.4	1967.0	7.7	12.0
MST M3 - 29 x 29 x 198 - G	3	9.42	198.0	21	29	29	26												1.2
ZST M4 - 39 x 39 x 1005 - G	4	12.57	1005.3	80	39	39	35	3	62.8	125.66	8	12	10	15	9	37.5	930.3	7.7	10.7
ZST M4 - 39 x 39 x 2010 - G	4	12.57	2010.6	160	39	39	35	3	62.8	125.66	16	12	10	15	9	37.5	1935.6	7.7	21.4
MST M4 - 39 x 39 x 201 - G	4	12.57	201.0	16	39	39	35												2.2
ZST M5 - 49 x 39 x 1005 - G	5	15.71	1005.3	64	49	39	34	3	62.8	125.66	8	12	14	20	13	30.1	945.0	11.7	13.1
ZST M5 - 49 x 39 x 2010 - G	5	15.71	2010.6	128	49	39	34	3	62.8	125.66	16	12	14	20	13	30.1	1950.4	11.7	26.2
MST M5 - 49 x 39 x 204 - G	5	15.71	204.0	13	49	39	34												2.7
ZST M6 - 59 x 49 x 1017 - G	6	18.85	1017.9	54	59	49	43	3	63.6	127.23	8	16	18	26	17	31.4	955.0	15.7	20.2
ZST M6 - 59 x 49 x 2035 - G	6	18.85	2035.8	108	59	49	43	3	63.6	127.23	16	16	18	26	17	31.4	1973.0	15.7	40.4
MST M6 - 59 x 49 x 207 - G	6	18.85	207.0	11	59	49	43												4.1
ZST M8 - 79 x 79 x 1005 - G	8	25.13	1005.3	40	79	79	71	3	62.8	125.66	8	25	22	33	21	26.6	952.0	19.7	44.3
ZST M8 - 79 x 79 x 2010 - G	8	25.13	2010.6	80	79	79	71	3	62.8	125.66	16	25	22	33	21	26.6	1957.3	19.7	88.6
MST M8 - 79 x 79 x 201 - G	8	25.13	201.0	8	79	79	71												8.9
ZST M10 - 99 x 99 x 1005 - G	10	31.42	1005.3	32	99	99	89	3	62.8	125.66	8	32	33	48	32	125.7	754.0	19.7	68.7
MST M10 - 79 x 79 x 219 - G	10	31.42	219.0	7	79	79	69												10.2
ZST M12 - 120 x 120 x 1017 - G	12	37.70	1017.9	27	120	120	108	3	63.6	127.23	8	40	39	58	38	127.2	763.4	19.7	109.0
MST M12 - 99 x 99 x 263 - G	12	37.70	263.0	7	99	99	87												19.0

<sup>1)</sup> m Module

<sup>3)</sup> n Number of holes

<sup>2)</sup> z Number of teeth

<sup>4)</sup> p Pitch ( $p=m \cdot \pi$ )


any other lengths on request

**2.2** Technical principles


Module pitches straight toothed

<b>Tooth rack:</b>	Pressure angle $\alpha = 20^\circ$ milled, induction hardened	<b>Quality:</b>	11 in accordance with DIN 3962, 3963, 3967
<b>Outer surfaces:</b>	ground on all sides	<b>F<sub>p</sub> (mm)</b>	Total pitch deviation
		<b>F<sub>p</sub>/1000 (mm)</b>	0,220 for a 1000 mm Length
		<b>F<sub>p</sub>/2000 (mm)</b>	0,330 for a 2000 mm Length


**Fig. 1**

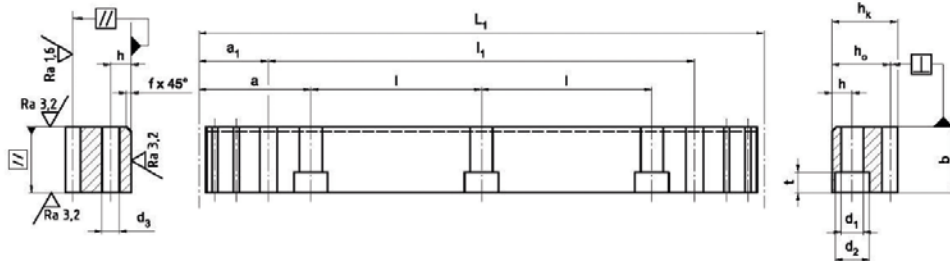

**Fig. 2**

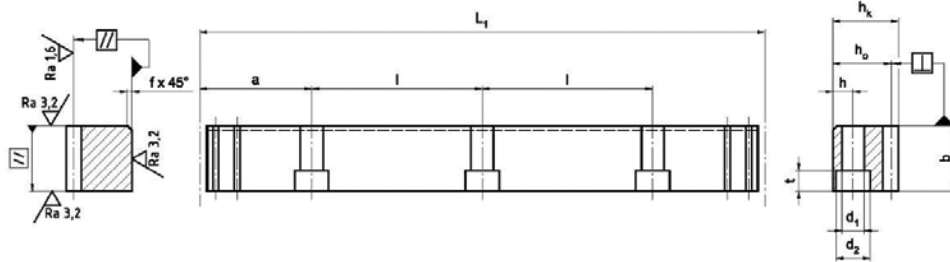

**Fig. 3**

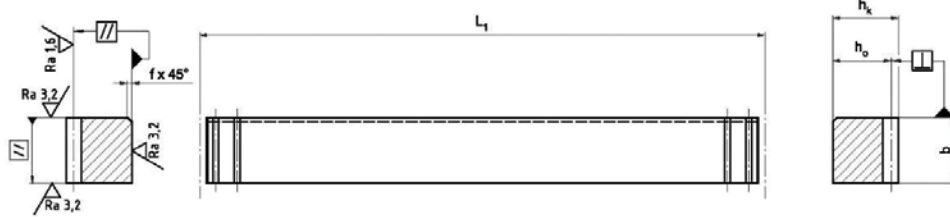

Standard lengths	m <sup>1)</sup>	p <sup>4)</sup>	L <sub>1</sub>	z <sup>2)</sup>	b	h <sub>k</sub>	h <sub>o</sub>	f	a	l	n <sup>3)</sup>	h	d <sub>1</sub>	d <sub>2</sub>	t	a <sub>1</sub>	l <sub>1</sub>	d <sub>3</sub>	Dimensions
	-	mm	mm	-	mm	mm	mm	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	mm	kg
ZST M2 - 24 x 24 x 1005 - G	2	6.28	1005.3	160	24	24	22	2	62.8	125.66	8	8	7	11	7	31.3	942.7	5.7	4.2
ZST M2 - 24 x 24 x 2010 - G	2	6.28	2010.6	320	24	24	22	2	62.8	125.66	16	8	7	11	7	31.3	1948.0	5.7	8.4
MST M2 - 24 x 24 x 201 - G	2	6.28	201.0	32	24	24	22												0.8
ZST M3 - 29 x 29 x 1017 - G	3	9.42	1017.9	108	29	29	26	2	63.6	127.23	8	9	10	15	9	34.4	949.1	7.7	6.0
ZST M3 - 29 x 29 x 2035 - G	3	9.42	2035.8	216	29	29	26	2	63.6	127.23	16	9	10	15	9	34.4	1967.0	7.7	12.0
MST M3 - 29 x 29 x 198 - G	3	9.42	198.0	21	29	29	26												1.2
ZST M4 - 39 x 39 x 1005 - G	4	12.57	1005.3	80	39	39	35	3	62.8	125.66	8	12	10	15	9	37.5	930.3	7.7	10.7
ZST M4 - 39 x 39 x 2010 - G	4	12.57	2010.6	160	39	39	35	3	62.8	125.66	16	12	10	15	9	37.5	1935.6	7.7	21.4
MST M4 - 39 x 39 x 201 - G	4	12.57	201.0	16	39	39	35												2.2
ZST M5 - 49 x 39 x 1005 - G	5	15.71	1005.3	64	49	39	34	3	62.8	125.66	8	12	14	20	13	30.1	945.0	11.7	13.1
ZST M5 - 49 x 39 x 2010 - G	5	15.71	2010.6	128	49	39	34	3	62.8	125.66	16	12	14	20	13	30.1	1950.4	11.7	26.2
MST M5 - 49 x 39 x 204 - G	5	15.71	204.0	13	49	39	34												2.7
ZST M6 - 59 x 49 x 1017 - G	6	18.85	1017.9	54	59	49	43	3	63.6	127.23	8	16	18	26	17	31.4	955.0	15.7	20.2
ZST M6 - 59 x 49 x 2035 - G	6	18.85	2035.8	108	59	49	43	3	63.6	127.23	16	16	18	26	17	31.4	1973.0	15.7	40.4
MST M6 - 59 x 49 x 207 - G	6	18.85	207.0	11	59	49	43												4.1
ZST M8 - 79 x 79 x 1005 - G	8	25.13	1005.3	40	79	79	71	3	62.8	125.66	8	25	22	33	21	26.6	952.0	19.7	44.3
ZST M8 - 79 x 79 x 2010 - G	8	25.13	2010.6	80	79	79	71	3	62.8	125.66	16	25	22	33	21	26.6	1957.3	19.7	88.6
MST M8 - 79 x 79 x 201 - G	8	25.13	201.0	8	79	79	71												8.9
ZST M10- 99 x 99 x 1005 - G	10	31.42	1005.3	32	99	99	89	3	62.8	125.66	8	32	33	48	32	125.7	754.0	19.7	68.7
MST M10- 79 x 79 x 219 - G	10	31.42	219.0	7	79	79	69												10.2
ZST M12- 120 x 120 x 1017 - G	12	37.70	1017.9	27	120	120	108	3	63.6	127.23	8	40	39	58	38	127.2	763.4	19.7	109.0
MST M12- 99 x 99 x 263 - G	12	37.70	263.0	7	99	99	87												19.0

<sup>1)</sup> m Module      <sup>3)</sup> n Number of holes  
<sup>2)</sup> z Number of teeth      <sup>4)</sup> p Pitch (p=m\*π)

any other lengths on request



## 2.3 Technical principles

### Metric pitch, straight toothed

**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground

**Outer surfaces:** ground on all sides

**Quality:** 6 in accordance with DIN 3962, 3963, 3967

**$f_p$  (mm)** Single pitch deviation  
Module  $\leq 3$ : 0.006  
Module  $> 3$ : 0.008

**$F_p$  (mm)** Total pitch deviation  
 **$Fp/1000$  (mm)** 0,035 for a 1000 mm Length

Fig. 1

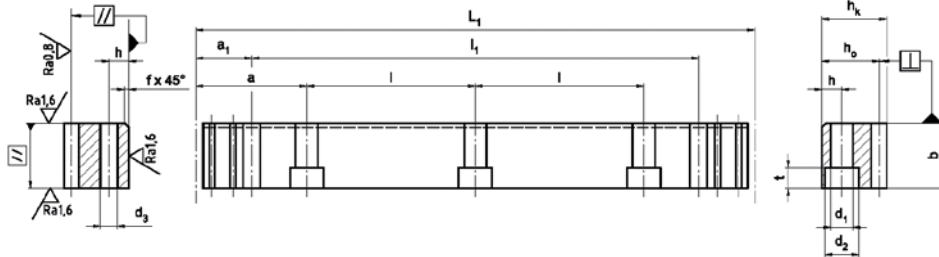


Fig. 2


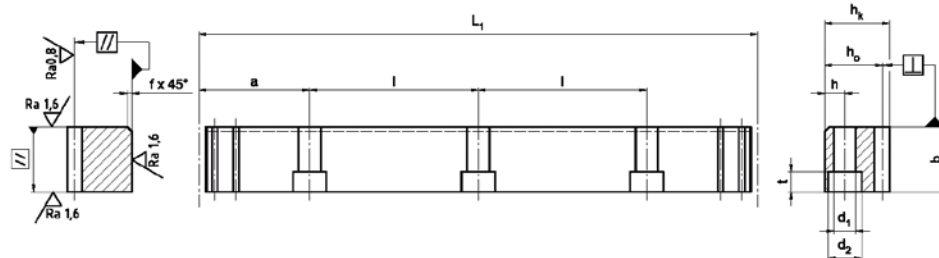


Fig. 3

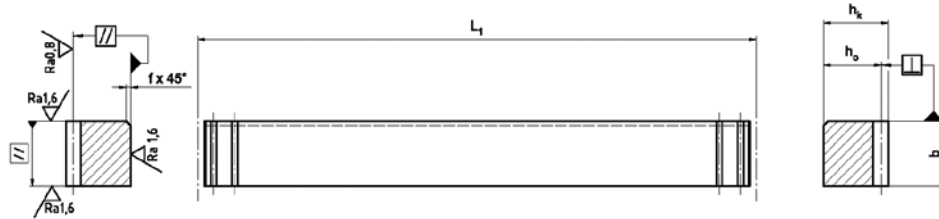

Standard lengths	p <sup>1)</sup> mm	m	L <sub>1</sub> mm	z <sup>2)</sup> -	b mm	h <sub>k</sub> mm	h <sub>0</sub> mm	f mm	a mm	l mm	n <sup>3)</sup> -	h mm	d <sub>1</sub> mm	d <sub>2</sub> mm	t mm	a <sub>1</sub> mm	l <sub>1</sub> mm	d <sub>3</sub> mm	Dimensions kg
ZST T5 - 24 x 24 x 600 - G	5	1,592	600	120	24	24	22,41	2	60	120	5	8	7	11	7	25	550	5,7	2,5
ZST T5 - 24 x 24 x 1200 - G			1200	240													1150		5,0
MST T5 - 24 x 24 x 120 - G	5	1,592	120	24	24	24	22,41												0,8
ZST T10 - 29 x 29 x 600 - G	10	3,183	600	60	29	29	25,82	2	60	120	5	9	10	15	9	25	550	7,7	3,6
ZST T10 - 29 x 29 x 1200 - G			1200	120													1150		7,2
MST T10 - 29 x 29 x 200 - G	10	3,183	200	20	29	29	25,82												1,2

<sup>1)</sup> m Module

<sup>3)</sup> n Number of holes

<sup>2)</sup> z Number of teeth

<sup>4)</sup> p Pitch ( $p=m \cdot \pi$ )

any other lengths on request




2.4 Technical principles

Module pitches helical toothed

**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground  
**Outer surfaces:** ground on all sides  
**Material:** X90CrMoV18

**Quality:** 6 in accordance with DIN 3962, 3963, 3967  
 **$f_p$  (mm)** Single pitch deviation  
Module  $\leq 3$ : 0.006  
Module  $> 3$ : 0.008  
 **$F_p$  (mm)** Total pitch deviation  
 **$F_p/1000$  (mm)** 0,035 for a 1000 mm Length

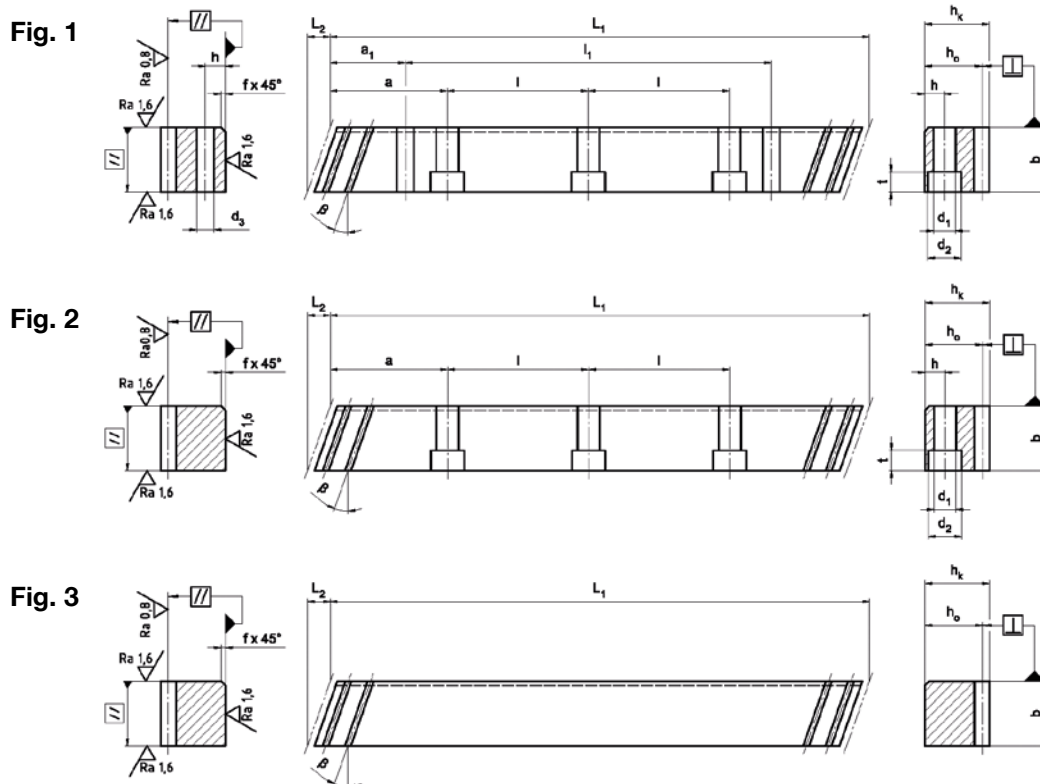

Standard lengths	m <sup>1)</sup>	p <sub>s</sub> <sup>4)</sup>	L <sub>1</sub>	L <sub>2</sub>	z <sup>2)</sup>	b	h <sub>k</sub>	h <sub>0</sub>	f	a	l	n <sup>3)</sup>	h	d <sub>1</sub>	d <sub>2</sub>	t	a <sub>1</sub>	l <sub>1</sub>	d <sub>3</sub>	Dimensions
	-	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	mm	kg
ZST M2 - 24 x 24 x 1000 - S	2	6.67	1000.0	8.5	150	24	24	22	2	62.5	125.00	8	8	7	11	7	31.7	936.6	5.7	4.1
MST M2 - 24 x 24 x 200 - SL	2	6.67	200.0	8.5	30	24	24	22												0.8
ZST M3 - 29 x 29 x 1000 - S	3	10.00	1000.0	10.3	100	29	29	26	2	62.5	125.00	8	9	10	15	9	35.0	930.0	7.7	5.9
MST M3 - 29 x 29 x 200 - SL	3	10.00	200.0	10.3	20	29	29	26												1.2
ZST M4 - 39 x 39 x 1000 - S	4	13.33	1000.0	13.8	75	39	39	35	3	62.5	125.00	8	12	10	15	9	33.3	933.4	7.7	10.7
MST M4 - 39 x 39 x 200 - SL	4	13.33	200.0	13.8	15	39	39	35												2.2
ZST M5 - 49 x 39 x 1000 - S	5	16.67	1000.0	17.4	60	49	39	34	3	62.5	125.00	8	12	14	20	13	37.5	925.0	11.7	13.0
MST M5 - 49 x 39 x 200 - SL	5	16.67	200.0	17.4	12	49	39	34												2.7

<sup>1)</sup> m Module

<sup>3)</sup> n Number of holes

<sup>2)</sup> z Number of teeth

<sup>4)</sup> p<sub>s</sub> End pitch (p<sub>s</sub>=m\* $\tau$ /cos  $\beta$ )

$\beta = 19.5283^\circ (19^\circ 31' 42'')$

any other lengths on request


**2.5** Technical principles

Module pitches straight toothed


**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground  
**Outer surfaces:** ground on all sides  
**Material:** X90CrMoV18

**Quality:** 6 in accordance with DIN 3962, 3963, 3967  
 **$f_p$  (mm)** Single pitch deviation  
Module  $\leq 3$ : 0.006  
Module  $> 3$ : 0.008  
 **$F_p$  (mm)** Total pitch deviation  
 **$F_p/1000$  (mm)** 0,035 for a 1000 mm Length


**Fig. 1**

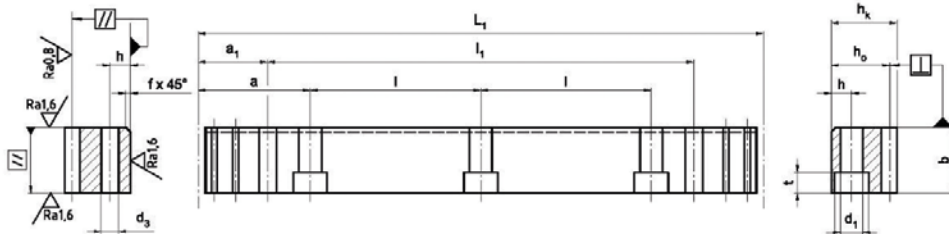

**Fig. 2**

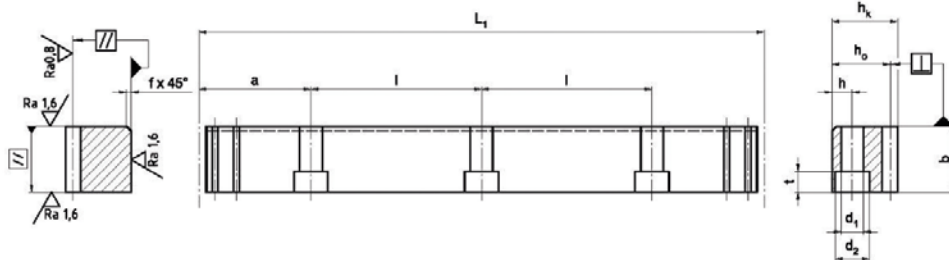

**Fig. 3**

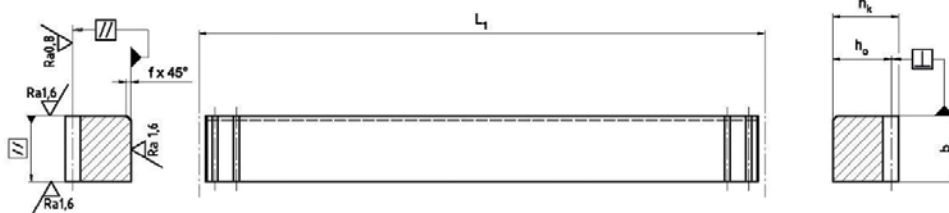

Standard lengths	m <sup>1)</sup>	p <sup>4)</sup>	L <sub>1</sub>	z <sup>2)</sup>	b	h <sub>k</sub>	h <sub>o</sub>	f	a	l	n <sup>3)</sup>	h	d <sub>1</sub>	d <sub>2</sub>	t	a <sub>1</sub>	l <sub>1</sub>	d <sub>3</sub>	Dimensions
	-	mm	mm	-	mm	mm	mm	mm	mm	mm	-	mm	mm	mm	mm	mm	mm	mm	kg
ZST M2 - 24 x 24 x 1005 - G	2	6.28	1005.3	160	24	24	22	2	62.8	125.66	8	8	7	11	7	31.3	942.7	5.7	4.2
MST M2 - 24 x 24 x 201 - G	2	6.28	201.0	32	24	24	22												0.8
ZST M3 - 29 x 29 x 1017 - G	3	9.42	1017.9	108	29	29	26	2	63.6	127.23	8	9	10	15	9	34.4	949.1	7.7	6.0
MST M3 - 29 x 29 x 198 - G	3	9.42	198.0	21	29	29	26												1.2
ZST M4 - 39 x 39 x 1005 - G	4	12.57	1005.3	80	39	39	35	3	62.8	125.66	8	12	10	15	9	37.5	930.3	7.7	10.7
MST M4 - 39 x 39 x 201 - G	4	12.57	201.0	16	39	39	35												2.2
ZST M5 - 49 x 39 x 1005 - G	5	15.71	1005.3	64	49	39	34	3	62.8	125.66	8	12	14	20	13	30.1	945.0	11.7	13.1
MST M5 - 49 x 39 x 204 - G	5	15.71	204.0	13	49	39	34												2.7

<sup>1)</sup> m Module

<sup>3)</sup> n Number of holes

<sup>2)</sup> z Number of teeth

<sup>4)</sup> p Pitch (p=m\* $\pi$ )


any other lengths on request

**2.6** Technical principles

Metric pitch, straight toothed

**Tooth rack:** Pressure angle  $\alpha = 20^\circ$   
ground  
**Outer surfaces:** ground on all sides  
**Material:** X90CrMoV18

**Quality:** 6 in accordance with DIN 3962, 3963, 3967  
 **$f_p$  (mm)** Single pitch deviation  
Module  $\leq 3$ : 0.006  
Module  $> 3$ : 0.008  
 **$F_p$  (mm)** Total pitch deviation  
 **$F_p/1000$  (mm)** 0,035 for a 1000 mm Length

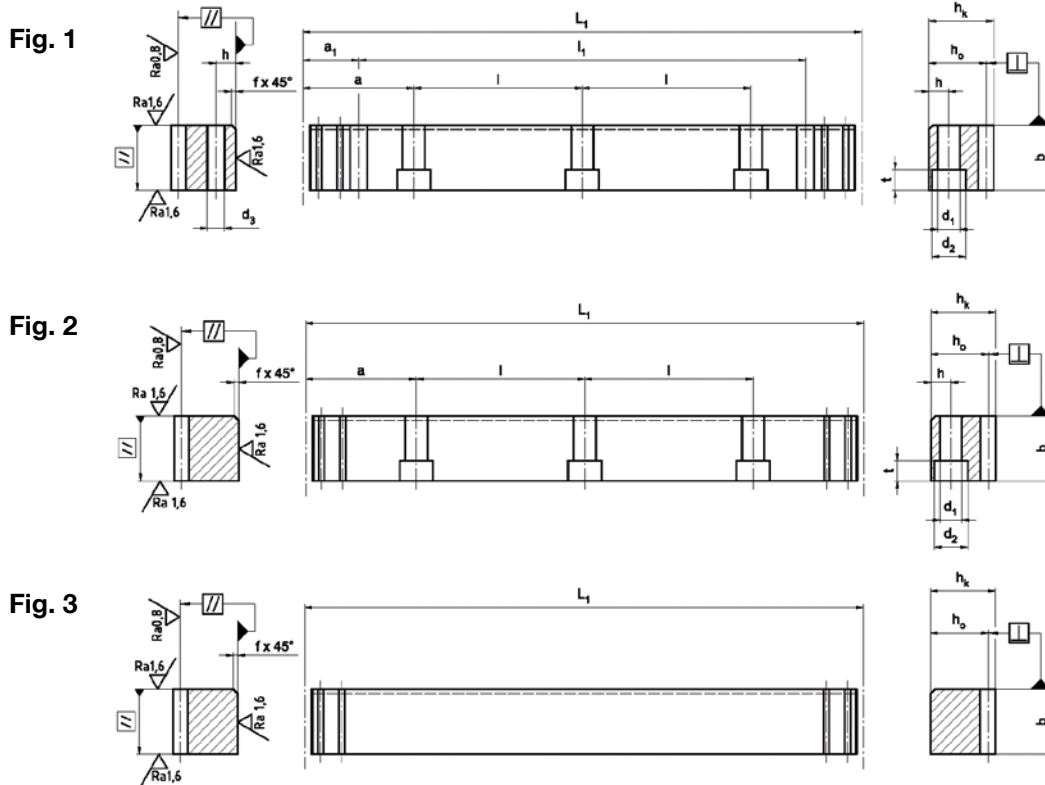

Standard lengths	$p^{1)}$ mm	$m$ -	$L_1$ mm	$z^{2)}$ -	$b$ mm	$h_k$ mm	$h_o$ mm	$f$ mm	$a$ mm	$l$ mm	$n^{3)}$ -	$h$ mm	$d_1$ mm	$d_2$ mm	$t$ mm	$a_1$ mm	$l_1$ mm	$d_3$ mm	Dimensions kg	
ZST T5 - 24 x 24 x 600 - G	5	1,592	600	120	24	24	22,41	2	60	120	5	8	7	11	7	25	550	5.7	2.5	
ZST T5 - 24 x 24 x 1200 - G			1200	240								10						1150		5.0
MST T5 - 24 x 24 x 120 - G	5	1,592	120	24	24	24	22,41													0.8
ZST T10 - 29 x 29 x 600 - G	10	3.183	600	60	29	29	25,82	2	60	120	5	9	10	15	9	25	550	7.7	3.6	
ZST T10 - 29 x 29 x 1200 - G			1200	120								10							1150	
MST T10 - 29 x 29 x 200 - G	10	3.183	200	20	29	29	25,82													1.2


1) m Module      3) n Number of holes  
2) z Number of teeth      4) p Pitch ( $p=m \cdot \pi$ )

any other lengths on request


## 2.7 Technical principles

### Customised gear racks


Any gear racks and guide racks can be made to a customer's drawing as long as they are within the specifications listed below.

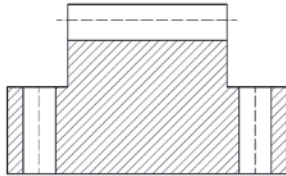


Unit weight:	max. 500 kg
Length:	max. 3000 mm
Tooth rack:	Modules 2 ... 20 Metric 5 mm ... 20 mm
Helix angle $\beta$	-30° ... +30° Left and right ascending
Material:	C45, 42CrMo4 V, 16MnCr5 X90CrMoV18 (stainless steel)
Hardening process:	Induction hardening Case hardening Through hardening Nitriding
Best accuracy:	Q4




Combination with profiled linear guideway





Screw connection from below

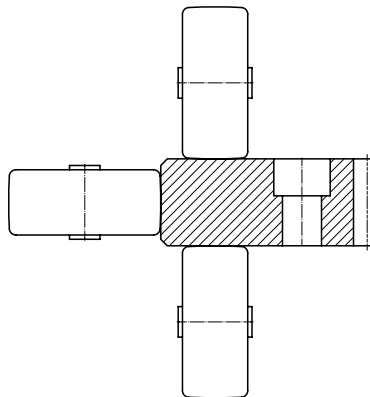

Box way with integrated tooth rack



Screw connection through the tooth rack

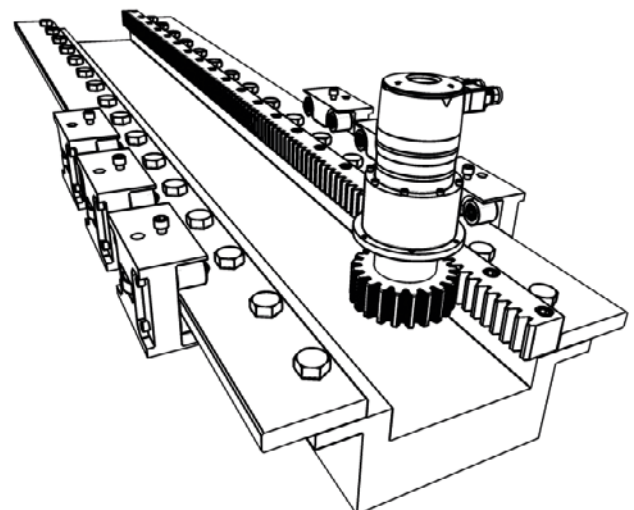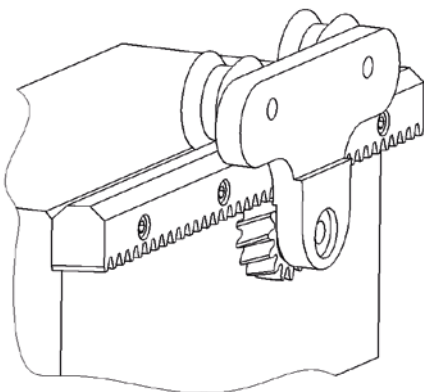

Gear rack integrated into linear bearing (guide rack)


## 3.1 Installation

### Gear rack fitting instructions / lubrication


Gear racks can be assembled in any lengths.

When assembling the spacing between two gear racks must be pitch precise.


Dowels may be needed for gear racks shorter than 1m.

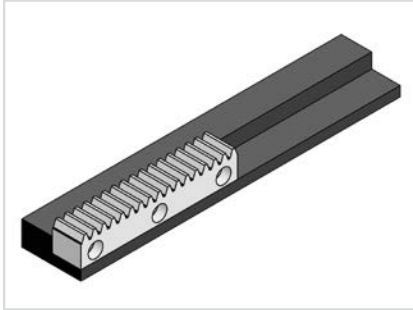

- Aligning the first gear rack
- Tighten the screws with a torque wrench.
- The torque depends on the friction condition and strength class of the screws.
- For soft or induction hardened gear racks use screws with a strength class of 10.9. For case and through hardened gear racks use strength class 12.9.

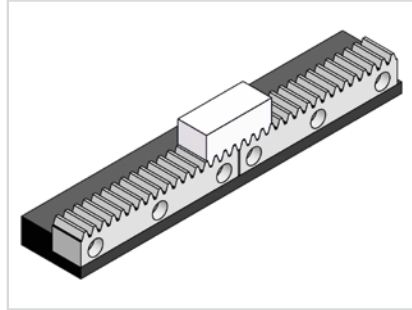

- Align the next gear rack with a mounting plate.
- Screw the gear rack on.

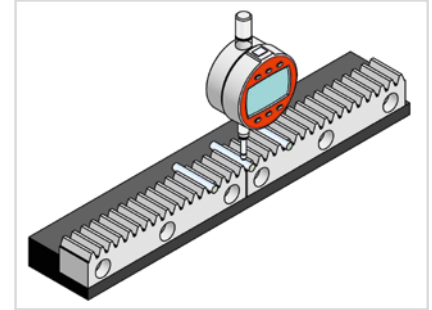

- Using a measuring roller check the height deviation at the transition point and if necessary change the position of one gear rack.
- Check that the gear racks are parallel to each other.
- Finally, insert the pins if necessary.

#### Lubrication - instructions for use

Adequate lubrication using a lubricant adapted to the operating conditions is required to maintain the functionality of the rack drive. Lubrication protects from wear and corrosion and reduces friction.



Apart from the initial lubrication during assembly, the machine must be lubricated regularly during operation.

Normally electrically-driven lubrication cartridges are used for lubrication. Lubrication greases NLGI 00 to NLGI 0 are applied to the drive pinion or the gear rack with a felt pinion.

A typical lubricant is Klüber Microlube GB 0.

Too little lubrication shortens the service life of the drive system. Therefore, always ensure that the machine is lubricated adequately.

The detailed version of our mounting instruction is available under [www.schneeberger.com/downloads](http://www.schneeberger.com/downloads).

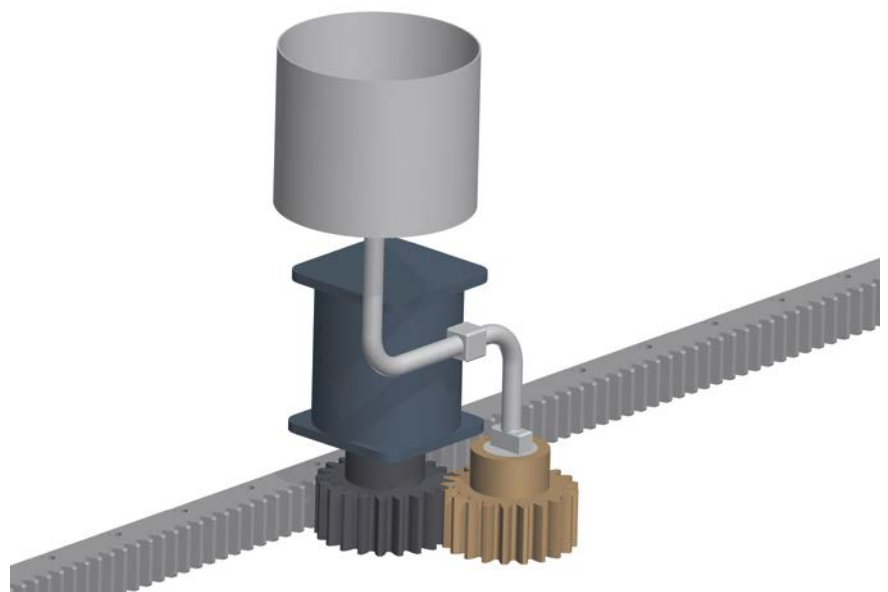

## 4.1 Order description

### Standard gear racks

Standard gear racks			___	ZST	M6	- 59x49x1000	-S	-I	-6	-D
Quantity										
Model	ZST									
Tooth rack	M ___	modular								
	T ___	metric, in mm								
Size	b x h <sub>k</sub> x L <sub>1</sub>	in mm								
Tooth rack	S	inclined to the right, 19.5283°								
	G	straight								
Hardness	C	Material 16MnCr5, case hardened								
	I	Material C45, induction hardened								
	W	Material C45, soft								
	N	Material 42CrMo4 V, nitrided								
	V	Material 42CrMo4 V, tempered								
	H	Material X90CrMoV18 (stainless steel), through hardened								
Accuracy	4, 5, 6, 7	ground								
	8	milled, soft								
	9	nitrided								
	11	milled, induction hardened								
Drilled holes	D	with pin and fixing holes				Fig. 1				
	OP	without pin holes				Fig. 2				
	OH	without holes				Fig. 3				

Standard assembly tool			___	MST	M6	-	-SL
Quantity							
Model	MST						
Tooth rack	M ___	modular					
	T ___	metric, in mm					
Grösse	b x h <sub>k</sub> x L <sub>1</sub>	in mm					
Tooth rack	SL	inclined to the left, 19.5283°					
	G	straight					

## 4.1 Order description

### Customised gear racks

Customised gear racks			___	ZST	M4	- 60x50x1820	-SL	-C	-5	-DX	-sp
Quantity											
Model	ZST										
Tooth rack	M ___	modular									
	T ___	metric, in mm									
Size	b x h <sub>k</sub> x L <sub>1</sub>	in mm									
Tooth rack	S	inclined to the right									
	SL	inclined to the left									
	G	straight									
Hardness	C	Material 16MnCr5, case hardened									
	O	Material 16 MnCr5, nitrided									
	I	Material C45, induction hardened									
	W	Material C45, soft									
	M	Material 42CrMo4 V induction hardened									
	N	Material 42CrMo4 V, nitrided									
	V	Material 42CrMo4 V, tempered									
	H	Material X90CrMoV18 (stainless steel), through hardened									
	S	special material									
Accuracy	4, 5, 6, 7	ground									
	8	milled, soft									
	9	nitrided									
	10, 11	milled, induction hardened									
Drilled holes	D	with pin and fixing holes	Fig. 1								
	OP	without pin holes	Fig. 2								
	OH	without holes	Fig. 3								
	-X	half hole pitch ( $l_x = \frac{1}{2} * l$ )									
Special features	sp	with special features as in the drawing									

Customised assembly tool			___	MST	M4		-SR	-sp
Quantity								
Model	MST							
Tooth rack	M ___	modular						
	T ___	metric, in mm						
Size	b x h <sub>k</sub> x L <sub>1</sub>	in mm						
Tooth rack	SL	inclined to the left						
	SR	inclined to the right						
	G	straight						
Special features	sp	with special features as in the drawing						



## 5.1 Quality

### Quality

All gear racks are manufactured on modern machine tools. The induction and through hardening is also done in-house.



It goes without saying that all SCHNEEBERGER production sites are ISO 9001 certified.

All process steps are self inspected by the machine operator. If required a measurement report is compiled on the quality of the gear rack.

The tooth rack profile complies with DIN 867, the tolerances for accuracy classes are based on DIN 3962, 3963 and 3967.

The tooth rack is measured on a CNC measuring machine.

The special feature of the SCHNEEBERGER standard tooth rack is the tip chamfer. This reduces the risk of injury to a minimum.

Our concern is to provide the best industrial companies with the best products and services because that is the key to our customers' success.



## PROSPECTUSES

- COMPANY BROCHURE
- CUSTOMIZED BEARINGS
- GEAR RACKS
- LINEAR BEARINGS and RECIRCULATING UNITS
- MINERAL CASTING SCHNEEBERGER
- MINISLIDE MSQscale
- MINI-X MINIRAIL / MINISCALE PLUS / MINISLIDE
- MONORAIL and AMS profiled linear guideways with integrated measuring system
- MONORAIL and AMS application catalog
- POSITIONING SYSTEMS
- SLIDES



[www.schneeberger.com](http://www.schneeberger.com)

[www.schneeberger.com/contact](http://www.schneeberger.com/contact)